

Direct current electronic drivers with DIP-SWITCH

Alimentatori elettronici in corrente continua con DIP-SWITCH

Made in Italy 

constant
CURRENT

constant
VOLTAGE

IS 15885
(Part 2 / Sec 13)

R - 41049751

 DAMP LOCATION

 UL US

 EN 05

 KEMA EUR

 CE

 CCC

 V110

 M

 M

 EL SELV 60V

**RIPPLE
FREE**



MP 32 K2



MP 32 BI

 3.5kV DIFF. 4kV COMM.

 ACTIVE PFC

 DIP-SWITCH

 SAFETY PROTECTIONS

Rated Voltage

Tensione Nominale

110 ÷ 127 V ⁽²⁾⁽⁴⁾

220 ÷ 240 V

Frequency

Frequenza

50-60 Hz

AC Operation range

Tensione di utilizzo AC

100 ÷ 264 V

DC Operation range

Tensione di utilizzo DC

(see page info15)

170 ÷ 280 V

Power - Potenza

1 ÷ 33 W

iTHD

≤ 15% ⁽¹⁾

Output current ripple

≤ 3% ⁽¹⁾

Standards compliance

CSA C22.2 no. 223 ⁽⁴⁾

EN 50172 (VDE 0108)

EN 55015

EN 61000-3-2

EN 61000-3-3

EN 61347-1

EN 61347-2-13

EN 61547

EN 62384

UL 1310 ⁽⁴⁾

VDE 0710-T14

Max. pcs for CB B16A

(see page info17)

50 pcs

In rush current

5A 50μsec

Article Articolo	Code Codice	P out W	V out DC ⁽¹⁾	I out DC	U out V	ta °C	tc °C	λ max. Power Factor	η max. Efficiency ⁽¹⁾
MP 32 K2	122200	Constant current output - Uscita in corrente costante				-25...+50	75	0,98	> 88
MP 32 BI ⁽³⁾	122454	17 (15 ⁽²⁾)	2...47	350 mA cost.	55				
		24 (15 ⁽²⁾)	2...47	500 mA cost.					
		25 (15 ⁽²⁾)	2...47	550 mA cost.					
		32 (15 ⁽²⁾)	2...46	700 mA cost.					
		20 (33 ⁽³⁾) (15 ⁽²⁾)	2...24 (39 ⁽³⁾)	850 mA cost.					
		20 (33 ⁽³⁾) (15 ⁽²⁾)	2...22 (37 ⁽³⁾)	900 mA cost.					
		Constant voltage output - Uscita in tensione costante							
		10 (10 ⁽²⁾)	10 cost.	1,05 A max.	-				
		13 (13 ⁽²⁾)	12 cost.	1,05 A max.	-				
		20 (15 ⁽²⁾)	24 cost.	1,05 A max.	-				

⁽¹⁾ Referred to V_m = 230 V, 100% load - Riferito a V_m = 230 V, carico 100%

⁽³⁾ Only for **MP 32 K2**

⁽⁶⁾ 122200BIS: order code for BIS marked product - codice di ordine per il prodotto marchiato BIS

Features

- Multipower driver supplied with dip-switch for the selection of the output current.
- IP20 independent driver, for indoor use (MP 32 K2).
- Class II protection against electric shock for direct or indirect contact (MP 32 K2).
- Driver for built-in use (MP 32 BI).
- It can be used for lighting equipment in protection class I and II (MP 32 BI).
- Active Power Factor Corrector.
- Current regulation ±5 % including temperature variations.
- Supplied with terminal cover and cable retainer.
- Input and output terminal blocks on the same side (wire cross-section up to 1,5 mm² / AWG15).
- Clamping screws on primary and secondary circuits for cables with diameter: min. 3 mm - max. 8 mm (MP 32 K2).
- Driver can be secured with slot for screws.
- Protections:
 - against overheating and short circuits;
 - against mains voltage spikes;
 - against overloads.
- Thermal protection = C.5.a.

Caratteristiche

- Alimentatore multipotenza fornito di dip-switch per la selezione della corrente in uscita.
- Alimentatore indipendente IP20, per uso interno (MP 32 K2).
- Protetto in classe II contro le scosse elettriche per contatti diretti e indiretti (MP 32 K2).
- Alimentatore da incorporare (MP 32 BI).
- Utilizzabile per apparecchi di illuminazione in classe di protezione I e II (MP 32 BI).
- PFC attivo.
- Corrente regolata ±5 % incluse variazioni di temperatura.
- Fornito di coprimorsetto e serracavo.
- Morsetti di entrata e uscita sullo stesso lato (sezione cavo fino a 1,5 mm² / AWG15).
- Serracavo su primario e secondario per cavi di diametro: min. 3 mm - max. 8 mm (MP 32 K2).
- Fissaggio dell'alimentatore tramite asole per viti.
- Protezioni:
 - termica e cortocircuito;
 - contro le extra-tensioni di rete;
 - contro i sovraccarichi.
- Protezione termica = C.5.a.

**7
YEARS
WARRANTY**
3% FAILURE RATE

**10
YEARS
WARRANTY**
5% FAILURE RATE


 PRODUCER'S LIABILITY

 10 YEARS WARRANTY 50 YEARS ACCORDING TO THE EUROPEAN DIRECTIVE


Direct current electronic drivers with DIP-SWITCH
Alimentatori elettronici in corrente continua con DIP-SWITCH

Made in Italy


IP 20 **SCREW FIXING** **Ø72** 2,83" **Weight - Peso gr. 120 / 4,2 oz.**
Compatible with ZHAGA (AS1) **Pcs - Pezzi 50**

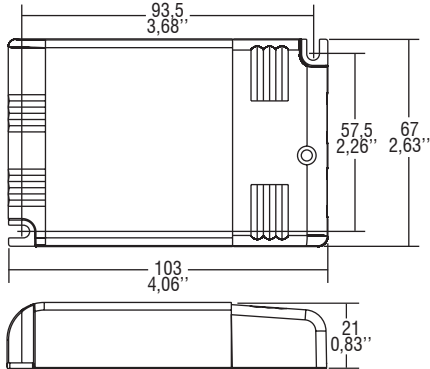

BUILT-IN **SCREW FIXING** **Weight - Peso gr. 115 / 4,1 oz.**
Compatible with ZHAGA (AS1) **Pcs - Pezzi 50**

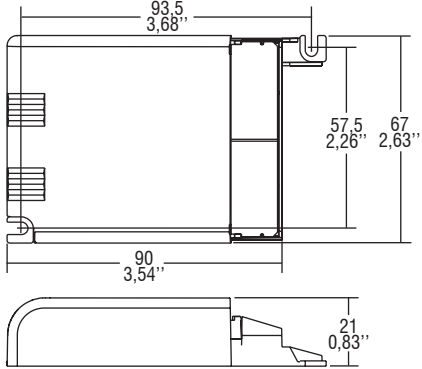

Wiring diagram - Schema di collegamento (Max. LED distance on page info8 - Massima distanza LED a pagina info8)



2.1
Multipower drivers - Compact case
Alimentatori multipotenza - Formato compatto