

constant
CURRENT

**RIPPLE
FREE**

Pst LM ≤ 1
SVM $\leq 0,4$



2.2

Multipower drivers - Linear case - Not dimmable
Alimentatori multipotenza - Formato lineare - Non regolabili



Rated Voltage
Tensione Nominale
220 ÷ 240 V

Frequency
Frequenza
50-60 Hz

AC Operation range
Tensione di utilizzo AC
198 ÷ 264 V

DC Operation range
Tensione di utilizzo DC
(see page info15)
176 ÷ 276 V

Power - Potenza
7 ÷ 55 W

iTHD
 $\leq 10\%$ ⁽¹⁾

Output current ripple
 $\leq 3\%$ ⁽¹⁾

Standards compliance
EN 55015
EN 60598-2-22
EN 61000-3-2
EN 61000-3-3
EN 61347-1
EN 61347-2-13
EN 61547
EN 62384

Max. pcs for CB B16A
(see page info17)
30 pcs

In rush current
45A 100 μ sec


Article Articolo	Code Codice	P out W	V out DC	I out DC	U out V	ta °C	tc °C	λ Power Factor	η max. Efficiency ⁽¹⁾
MPSE 55/350 SLIM	127524	26	70...260	100 mA cost.	340	-25...+50	85	0,95 ⁽²⁾	> 94 %
		30,5	60...260	117 mA cost.					
		35	60...260	134 mA cost.					
		39	60...260	150 mA cost.					
		43,5	60...260	167 mA cost.					
		48	60...260	184 mA cost.					
		52	40...260	200 mA cost.					
		55	40...253	217 mA cost.					
		55	40...235	234 mA cost.					
		55	40...220	250 mA cost.					
		55	40...206	267 mA cost.					
		55	40...194	284 mA cost.					
		55	40...183	300 mA cost.					
		55	40...174	317 mA cost.					
55	40...165	334 mA cost.							
55	40...158	350 mA cost.							

⁽¹⁾ Referred to $V_{in} = 230$ V, 100% load - Riferito a $V_{in} = 230$ V, carico 100% ⁽²⁾ Pout > 27 W

Light output level in DC operation: Factory default 100% EOfi=1

Livello di emissione luminosa in funzionamento DC: Impostazioni di fabbrica 100% EOfi=1

BUILT-IN SCREW FIXING Weight - Peso gr. 140 / 4,9 oz.
Pcs - Pezzi 70

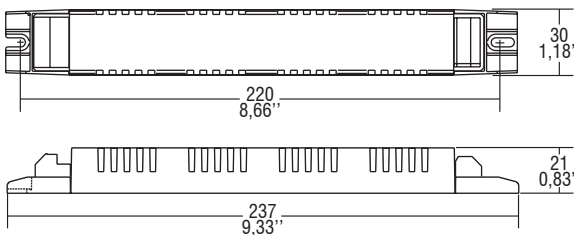

Wiring diagram - Schema di collegamento

(Max. LED distance on page info8
Massima distanza LED a pagina info8)



Features

- Driver for built-in use.
- Multipower driver supplied with dip-switch for the selection of the output current.
- Active Power Factor Corrector.
- Current regulation $\pm 5/10\%$ including temperature variations.
- It can be used for lighting equipment in protection class I.
- Output is not isolated from the input.
- Input and output terminal blocks on opposite sides (wire cross-section up to 1,5 mm² / AWG15).
- Driver can be secured with slot for screws.
- Protections:
 - short circuits;
 - against mains voltage spikes;
 - against overloads.
- Thermal protection = C.5.a.

Caratteristiche

- Alimentatore da incorporare.
- Alimentatore multipotenza fornito di dip-switch per la selezione della corrente in uscita.
- PFC attivo.
- Corrente regolata $\pm 5/10\%$ incluse variazioni di temperatura.
- Utilizzabile per apparecchi di illuminazione in classe di protezione I.
- Uscita non isolata dall'ingresso.
- Morsetti di entrata e uscita contrapposti (sezione cavo fino a 1,5 mm² / AWG15).
- Fissaggio dell'alimentatore tramite asole per viti.
- Protezioni:
 - al cortocircuito;
 - contro le extra-tensioni di rete;
 - contro i sovraccarichi.
- Protezione termica = C.5.a.

7 YEARS WARRANTY
3% FAILURE RATE

10 YEARS WARRANTY
5% FAILURE RATE

PRODUCER'S LIABILITY
TCI

WARRANTY TO THIRD PARTIES
10 YEARS
ACCORDING TO THE CONTRACTUAL CONDITIONS