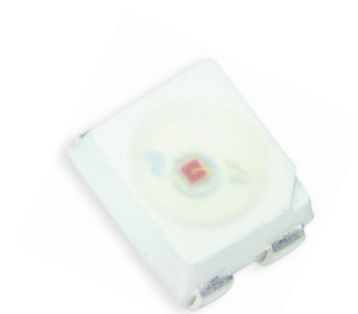


PLCC Series

3528 0.2W Single Color 4P (H) Datasheet - Automotive

Automotive
LightingSignal
Lighting

Mood Lighting

Decorative
Light

Warning Light

Introduction :

Ultra high luminous efficacy, combined with the flexibility in design due to its slim and miniature size, PLCC LED Series are optimized to be used as lighting for automotive signal lighting designs or signboard.

Description :

- Best luminous and color uniformity
- Enables halogen and CDM replacement
- The article itself presents the actual color.
- Wide Viewing angle 120°
- Automotive lighting interior and exterior
- Signal and Symbol Luminaire

Feature and Benefits :

- High luminous Intensity and high efficiency
- Excellent performance and visibility
- Suitable for all SMT assembly methods
- IR reflow process compatible
- Environmental friendly; RoHS compliance
- Qualification according to AEC-Q101

Table of Cotents

General Information	3
Absolute Maximum Ratings	4
Characteristics	4
Luminous Intensity Characteristic.....	5
Voltage Bin Structure	5
Wavelength Bin Structure	6
Mechanical Dimensions	7
Characteristic curve	8
Reflow Profile	17
Reliability.....	18
Product Packaging Information	19
Revision History	20
About Edison Opto	20

General Information

Ordering Code Format

2 T 03 X2 xX X 00 03 xxx
 X1 X2 X3-X4 X5-X6 X7-X8 X9 X10-X11 X12-X13 X14-X16

X1		X2		X3-X4		X5-X6		X7-X8	
Type		Component		Series		Wattage		Color/CCT	
2	Emitter	T	PLCC	03	3528	X2	0.2W	RX	Red
								YX	Yellow

X9		X10-X11		X12-X13		X14-X16	
BIN		CRI		Voltage		Serial Number	
X	Single Color	00	-	03	3V	-	-

Absolute Maximum Ratings

Absolute maximum ratings ($T_J=25^{\circ}\text{C}$)

Parameter	Symbol	Value	Units
Forward Current	I_F	7...70	mA
Pulse Forward Current ($t_p \leq 100\mu\text{s}$, Duty cycle=0.25)	I_{pulse}	100	mA
Reverse Voltage	V_R	-	V
Reverse Current	I_R	10	μA
LED Junction Temperature	T_J	125	$^{\circ}\text{C}$
Operating Temperature	-	-40 ~ +100	$^{\circ}\text{C}$
Storage Temperature	-	-40 ~ +125	$^{\circ}\text{C}$
ESD Sensitivity	V_B	2,000	V
Soldering Temperature	T_s	Reflow Soldering : 255~260 $^{\circ}\text{C}$ /10~30sec Manual Soldering : 350 $^{\circ}\text{C}$ /3sec	

Notes:

1. Proper current derating must be observed to maintain junction temperature below the maximum at all time.
2. LEDs are not designed to be driven in reverse bias.
3. t_p : Pulse width time

Characteristics

Parameter	Symbol	Value	Units
Viewing Angle	(Typ.) $2\theta_{1/2}$	120	Degree
Thermal resistance	(Rth J-A) (Rth J-S)	300 130	$^{\circ}\text{C}/\text{W}$
Wavelength	-	615-630(Red) 585-595(Yellow)	nm
JEDEC Moisture Sensitivity	-	Level 2a Floor Life Conditions: $\leq 30^{\circ}\text{C}$ / 60% RH Soak Requirements(Standard) Time (hours): 120+1/-0 Conditions: 60 $^{\circ}\text{C}$ / 60% RH	-

Notes:

1. $2\theta_{1/2}$ is the off-axis angle where the luminous intensity is half of the axial luminous intensity.
2. Edison Opto maintains a tolerance of $\pm 1\text{ nm}$ for dominant wavelength.

Luminous Intensity Characteristic

Luminous Intensity Characteristics Tj=25°C

Color	Group	Min Luminous Intensity (mcd)	Max Luminous Intensity (mcd)	Forward Current (mA)	Order Code
Red	H0	3200	3650	70	2T03X2RXX00030A2
	I0	3650	4150		
	J0	4150	4700		
Yellow	H0	3200	3650		2T03X2YXX00030A2
	I0	3650	4150		
	J0	4150	4700		

Note:

The luminous intensity performance is guaranteed within published operating conditions. Edison Opto maintains a tolerance of $\pm 10\%$ on intensity measurements.

Voltage Bin Structure

Group	Min Voltage (V)	Max Voltage (V)
U04	1.9	2.2
U05	2.2	2.5
V00	2.5	2.8

Note:

Forward voltage measurement allowance is $\pm 0.06V$.


Wavelength Bin Structure

Color	Group	Min Wd (nm)	Max Wd (nm)
Red	OX2	615	620
	RX0	620	630
Yellow	YW0	585	588
	YX0	588	591
	YY0	591	595


Note:
Dominant wavelength measurement allowance is ± 1 nm.

Mechanical Dimensions


Emitter Type Dimension

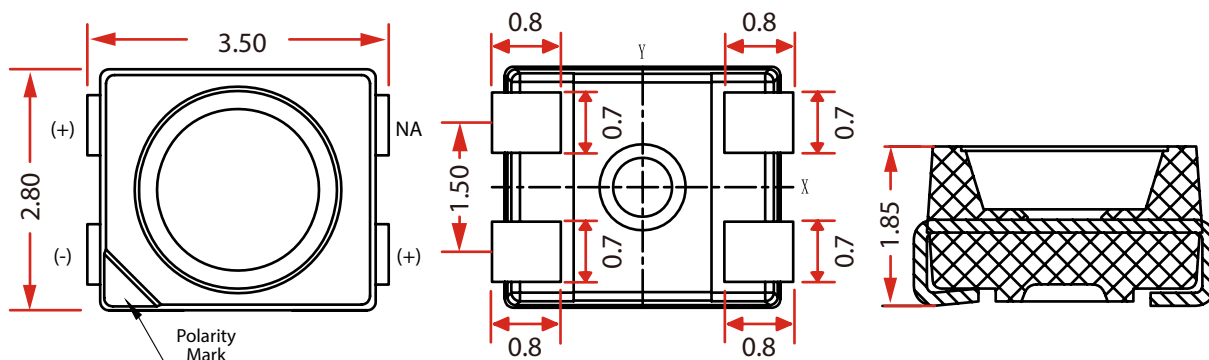

Circuit



Solder Pad

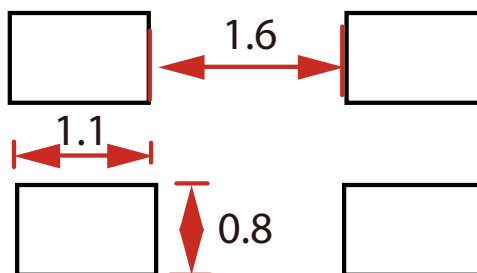


Notes:


1. All dimensions are measured in mm.
2. Tolerance : ± 0.2 mm

Characteristic curve


Color Spectrum

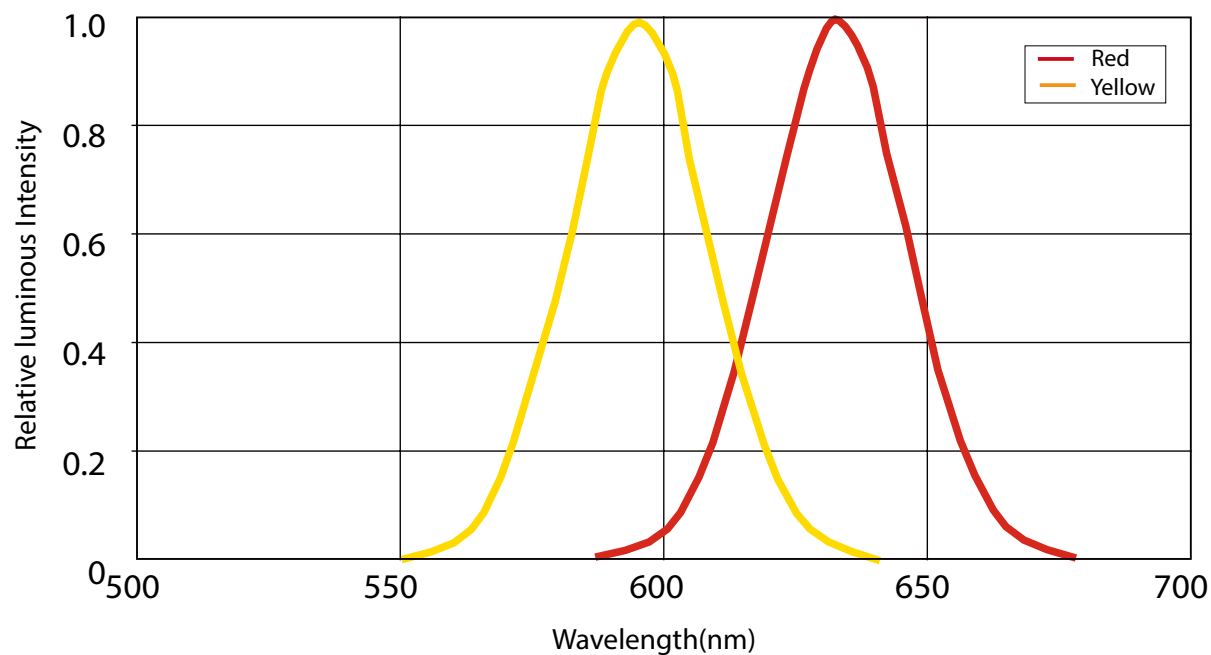


Beam Pattern

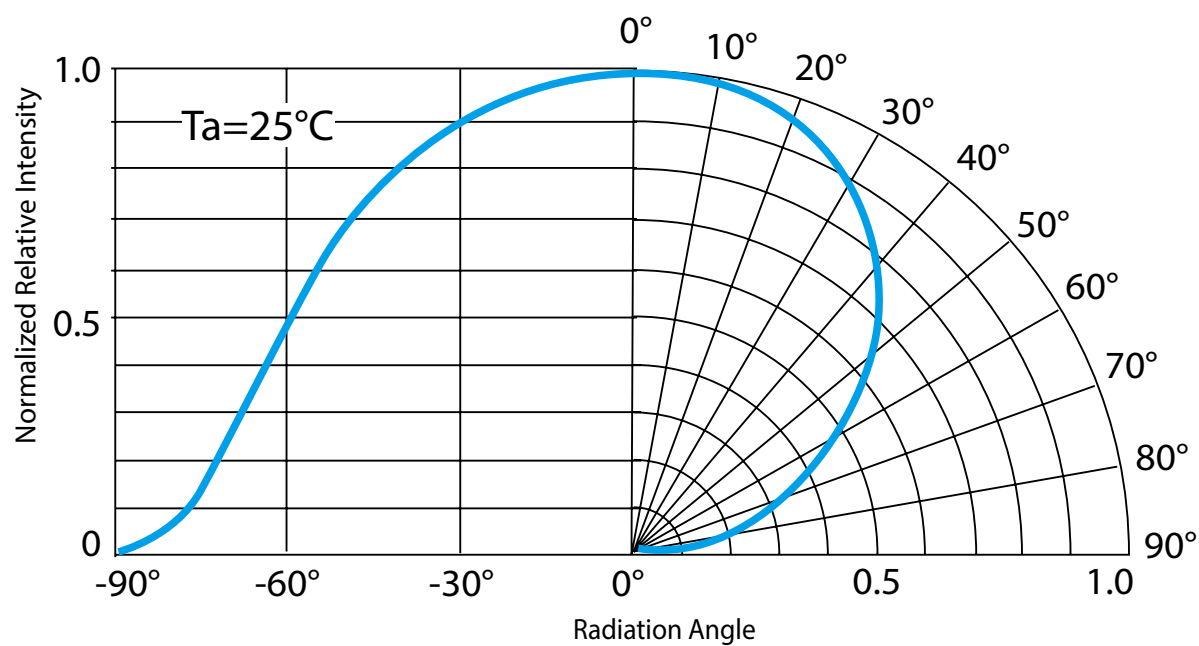


Forward Current vs. Forward Voltage

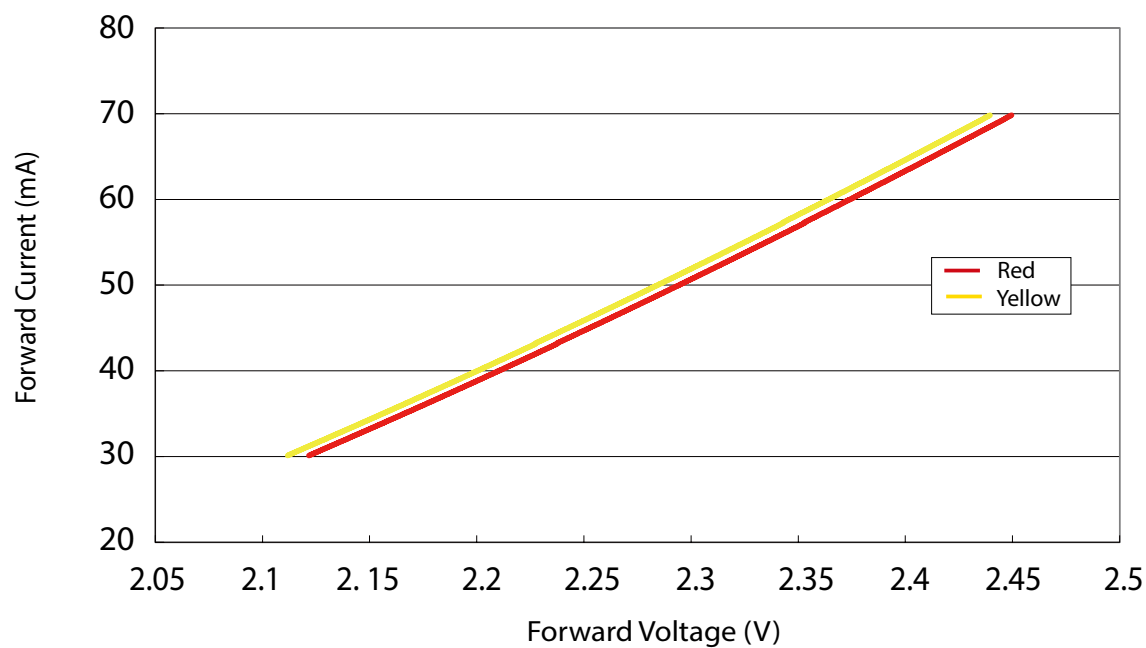


Relative luminous Intensity vs. Forward Current

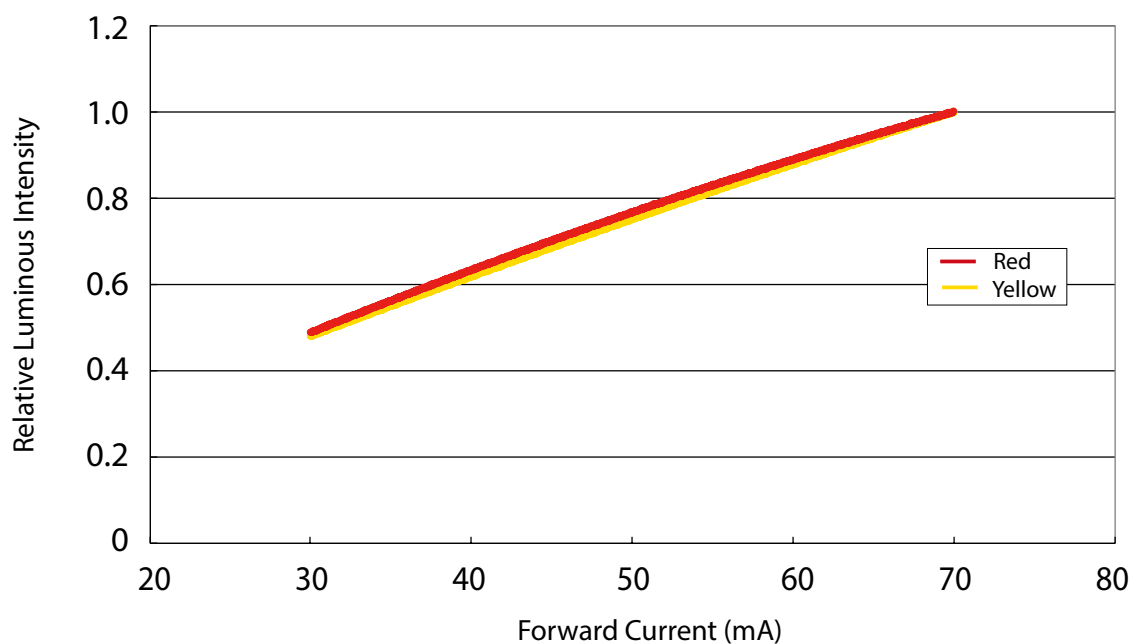


Relative Luminous Intensity vs. Junction Temperature

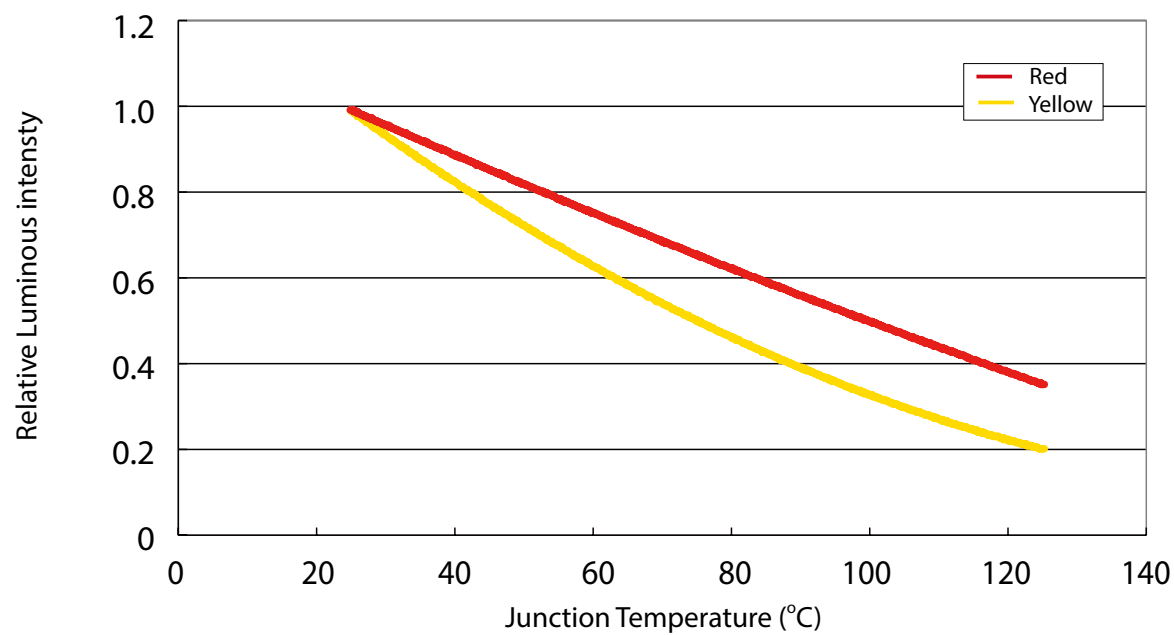


Forward Voltage vs. Junction Temperature

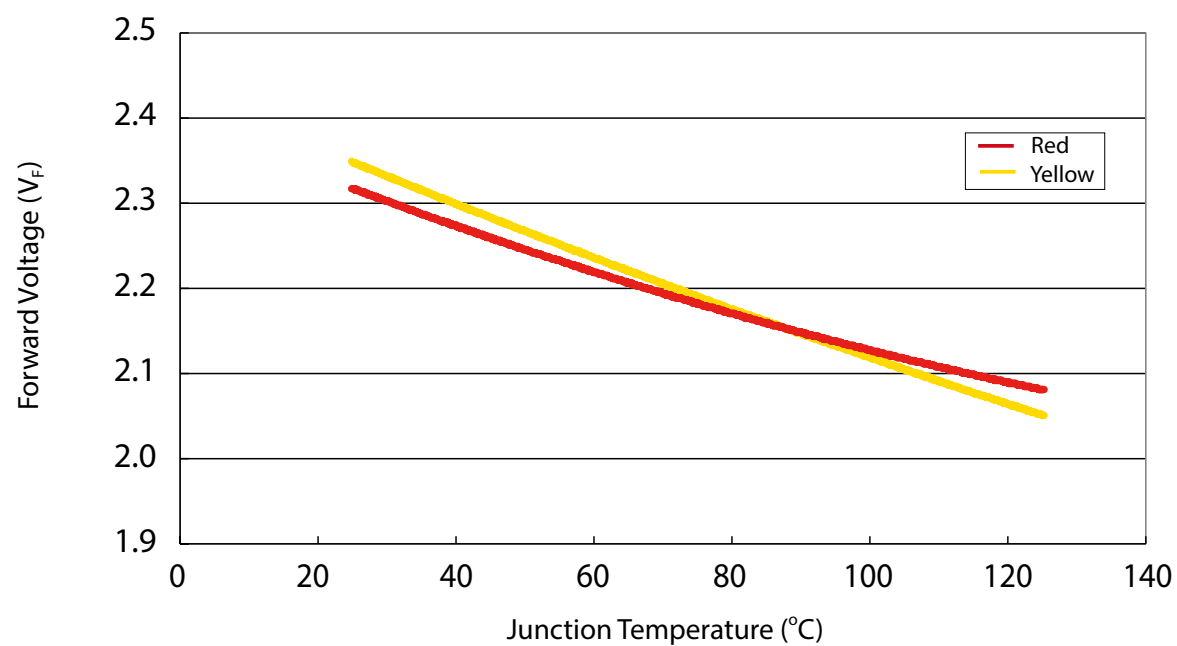


Wavelength vs. Forward Current

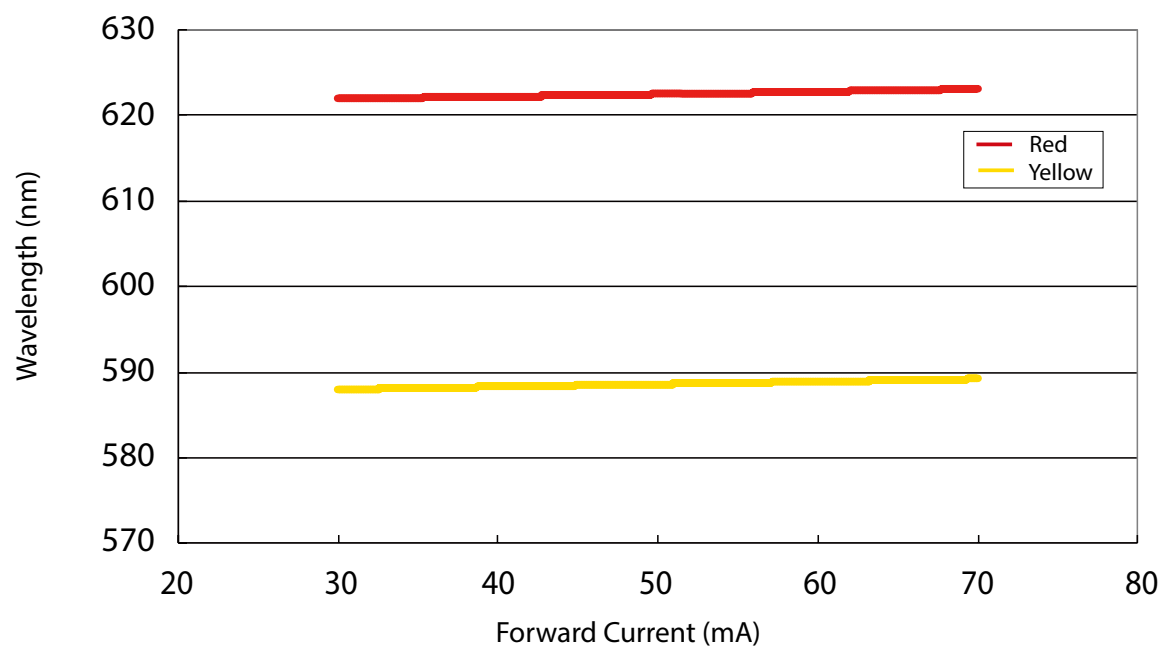

Wavelength vs. Junction temperature

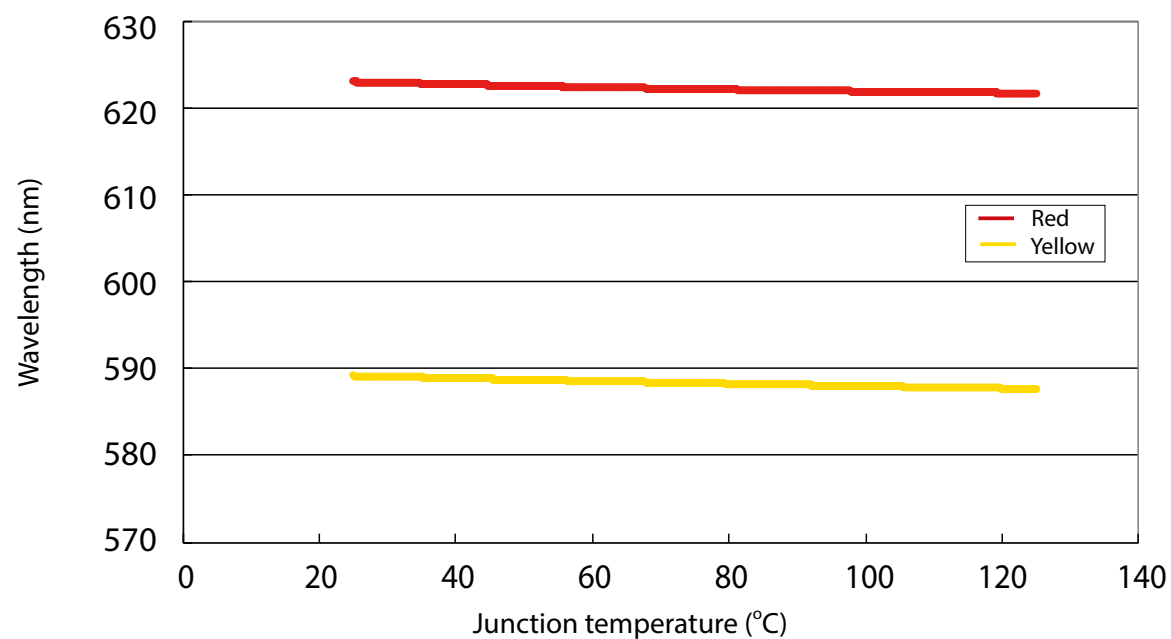


Maximum Current vs. Temperature

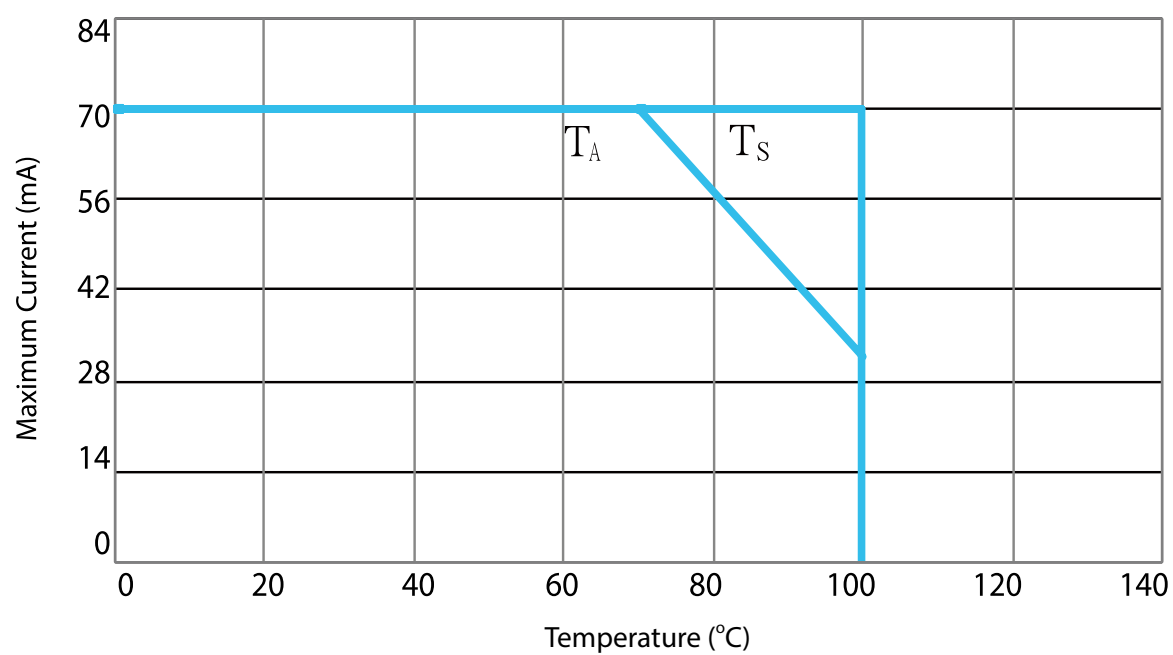

Reflow Profile

The following reflow profile is from IPC/JEDEC J-STD-020D which provided here for reference.

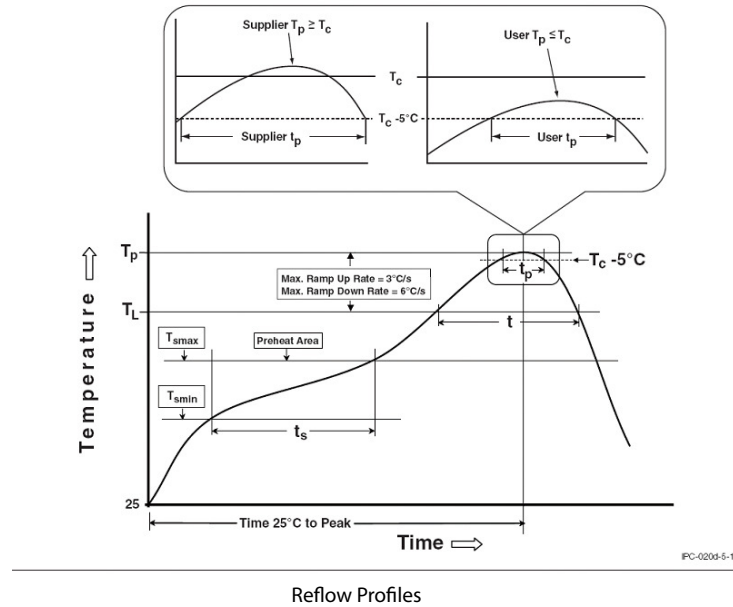

Classification Reflow Profiles

Profile Feature	Pb-Free Assembly
Preheat & Soak	150 °C
Temperature min (T _{min})	200 °C
Temperature max (T _{max})	60-120 seconds
Time (T _{min} to T _{max}) (t _s)	
Average ramp-up rate (T _{max} to T _p)	3 °C/second max.
Liquidous temperature (T _L)	217 °C
Time at liquidous (t _L)	60-150 seconds
Peak package body temperature (T _p)*	255 °C ~260 °C *
Classification temperature (T _c)	260 °C
Time (t _p)** within 5 °C of the specified classification temperature (T _c)	30** seconds
Average ramp-down rate (T _p to T _{max})	6°C/second max.
Time 25°C to peak temperature	8 minutes max.

Notes:

- * Tolerance for peak profile temperature (T_p) is defined as a supplier minimum and a user maximum.
- ** Tolerance for time at peak profile temperature (t_p) is defined as a supplier minimum and a user maximum.

Reliability

NO.	Test Item	Reference	Test Condition	Duration/ Cycle	Failure Criteria	Sample size
1	External Visual	JESD22 B-101	Visual Inspection	---	No visual damage	77
2	Physical Dimension	JESD22 B-100	Verify physical dimensions against device mechanical drawing	1 times	CPK>1.33	30
3	High Temperature Forward Bias	JESD22 A-108	Ta=100°C , IF=70mA	1,000 hrs	1. VF+/- 10% 2. Iv+/- 15% 3. Cx/Cy+/- 0.02	77
4	Temperature Cycle	JESD22 A-104	Ta=-40°C~100°C, 30min dwell, 5 min transfer	1000 Cycle	No dead lamps and visual damage	77
5	Thermal Shock	JESD22 A-104	-40°C/125°C, 20min dwell, <10sec transfer	1000 Cycle	No dead lamps and visual damage	77
6	High Temperature High Humidity Bias	JESD22 A-101	Ta=85°C RH=85%, IF=70mA	1,000 hrs	1. VF+/- 10% 2. Iv+/- 15% 3. Cx/Cy+/- 0.02	77
7	Intermittent Operational Life	MIL-750 1037	Ta=25°C, 3sec on, 3sec off, IF=70mA	10W times	No dead lamps and visual damage	77
8	Power and Temperature Cycle	JESD22 A-105	Ta=-40°C~100°C, 30min dwell, 5min transfer, IF=70mA	1,000 hrs	1. VF+/- 10% 2. Iv+/- 15% 3. Cx/Cy+/- 0.02	77
9	D.P.A.	AEC-Q101-004 Section 4	Random Sample TC	---	No visual damage	2
10	Resistance to Soldering Heat	MIL-202 Method 210	Solder iron temperature : 350 °C ± 10 °C. dwell time : 4~5 seconds	4~5 seconds	Desoldering performance	30
11	Solderability	J-STD-002	Ta=245°C±5, 3sec	5 seconds	Over 95% area	10
12	High Temperature storage	Jesd22A-103B	Ta=100°C	1,000 hrs	No dead lamps and visual damage	77
13	Low Temperature storage	Jesd22A-119	Ta=-40°C	1,000 hrs	No dead lamps and visual damage	77



Cautions

LEDs should be stored or lighted in the environment of no sulfur.


Some materials,such as plastic seals,printing ink,enclosures and adhesives,may contain sulfur.

LEDs also should not be exposed in the acid or halogen environment.

Product Packaging Information

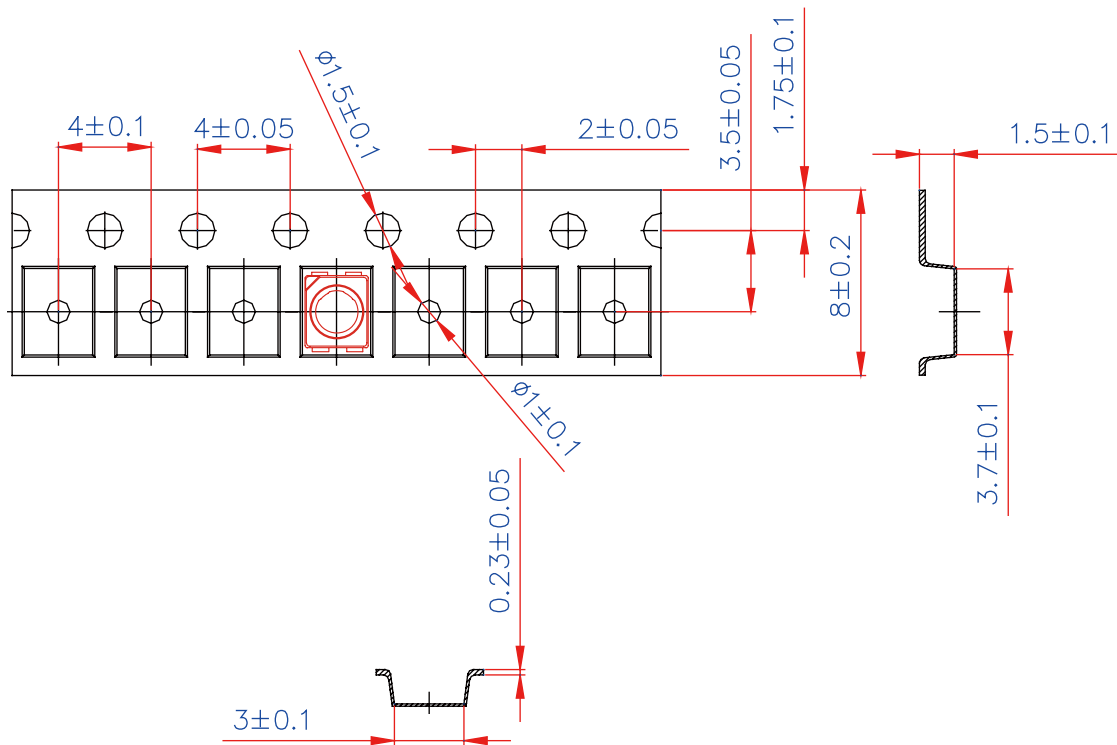

Taping reel dimensions

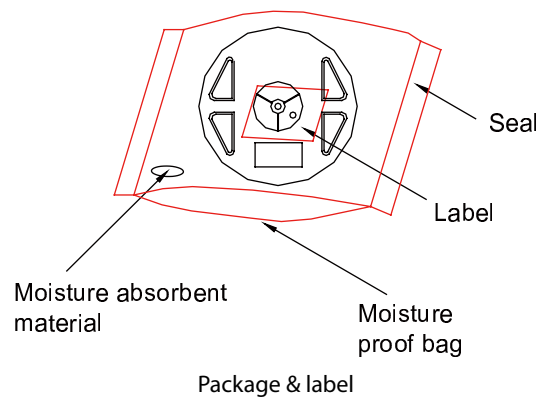

Item	Quantity	Total	Dimensions(mm)
Reel	2,000pcs	2,000pcs	R=178
Starting with 150pcs empty, and 150pcs empty at the last			

Revision History

Versions	Description	Release Date
1	Establish a Datasheet	2017/06/05
2	Modify the Reliabilitys	2018/09/05

About Edison Opto

Edison Opto is a leading manufacturer of high power LED and a solution provider experienced in LDMS. LDMS is an integrated program derived from the four essential technologies in LED lighting applications- Thermal Management, Electrical Scheme, Mechanical Refinement, Optical Optimization, to provide customer with various LED components and modules. More Information about the company and our products can be found at www.edison-opto.com

Copyright©2018 Edison Opto. All rights reserved. No part of publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photo copy, recording or any other information storage and retrieval system, without prior permission in writing from the publisher. The information in this publication are subject to change without notice.

www.edison-opto.com

For general assistance please contact:
service@edison-opto.com.tw

For technical assistance please contact:
LED.Detective@edison-opto.com.tw