

Product Specification

Product class: LED LENS

Item No: **DK-100-100X60-TP-IV-S-28H1-U1**

Material: PC 抗 UV

Certification: RoHS


Set Up:PeiShan Wu

Check:Xuan Yang


Content

Specification-----	3
2D Drawing-----	4
Optical Datasheet-----	5
Packing Details-----	6
Application Notes-----	7

Specification

Item No	Picture	Size	Matched LED	Lighting Application
DK-100-100X60-TP-IV-S-28H1-U1		Diameter: 100*100mm Height: 8.5mm FWHM: 100*60 °	3535	street lamp

Drawing

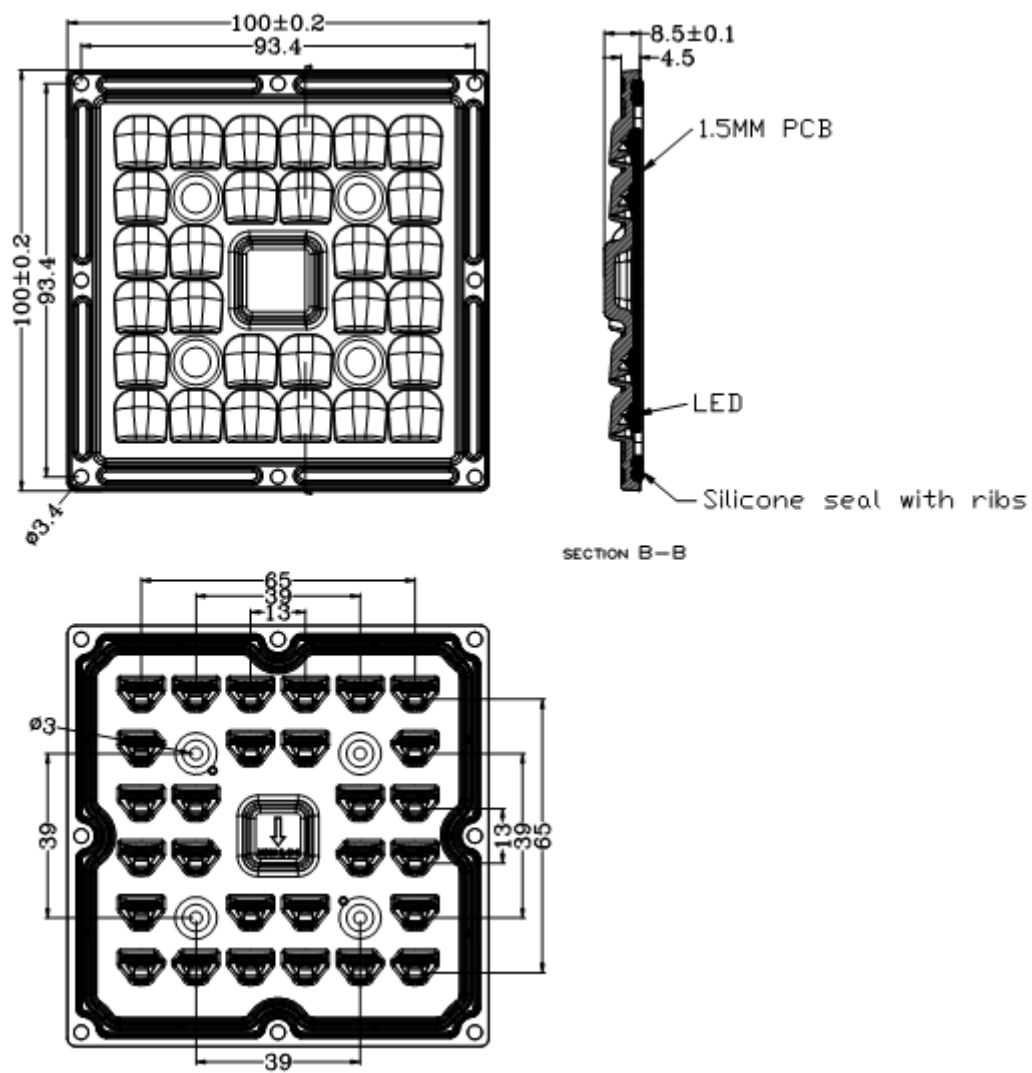

Optical test report

产品特点

灯具制造厂商:	电压: 38.0 V
光源型号: 3535	功率: 6.25 W
电流: 0.165 A	
功率因数: 1.000	


光度结果

灯具CIE分类: 直接型	额定光通量: 756.3 lm
灯具光通量: 756.3 lm	灯具效率: 100%
下射光通量比: 96%	上射光通量比: 4%
水平扩散角(10%, 50%, 75%, 100%): H150.9, H127.1, H115.1, H83	
垂直扩散角(10%, 50%, 75%, 100%): V165.8, V124.7, V74.1, V58	
灯具光效等级(LER): 121.06	中心光强: 156.26 cd
峰值光强: 329.45 cd	峰值光强位置: H90 V58
S/MH(C0/C180): 1.84	S/MH(C90/C270): 1.63



灯具实物照片



配光曲线

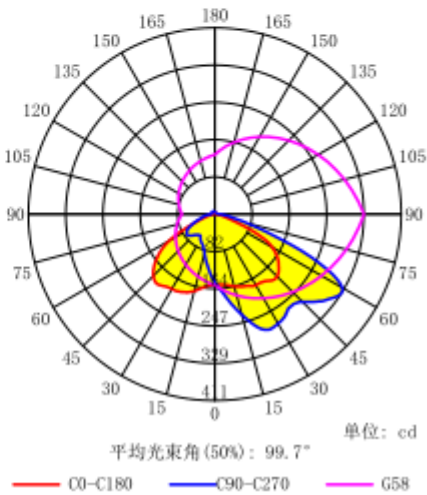

配光曲线

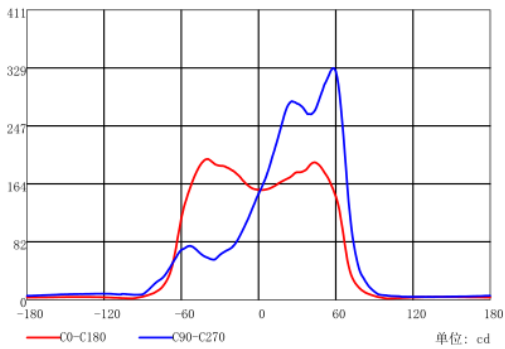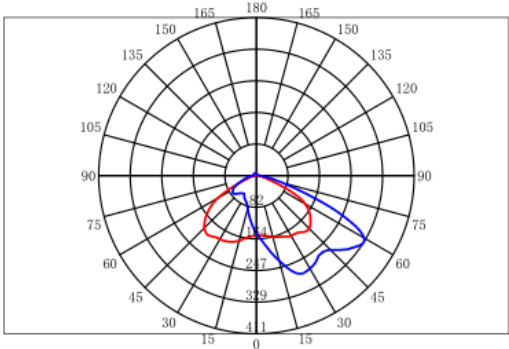

Packing Details

Packing Material	Packing Materil size	Packing Specification
Pearl wool	310*230mm	117PCS/inner box 4inner box / 1 outer box
White paperboard	A level; 400g; 310*235mm	
Inner box	335*245*105mm	
Outer box	A=B 510*330*255mm	

Application Notes

(1) Please use a little water and soft fabric (air-laid paper) to clean the lens & reflector if necessary.

(2) Forbid to use industrial solvent to clean the lens, such as alcohol.

(3) The working temperature is $-40^{\circ}\text{C} \sim +80^{\circ}\text{C}$ (PMMA) or $-35^{\circ}\text{C} \sim +120^{\circ}\text{C}$ (PC).

(4) Storage environment temperature is $0^{\circ}\text{C} \sim 40^{\circ}\text{C}$, humidity is 30%~95%.

Optic Lens has the function to change the ray of light, it is made of optical material, the effect shall be influenced once pollute. Please do not open the packing before use it, to avoid the dust pollution.

(5) Protect the product from the sun and other ultraviolet ray, as these will lead to aging, change color, crack, etc.

(6) Please wear gloves once install the lens, avoid to abrasion the lens surface.

(7) Forbid to use acidic or alkaline solution touch the product, avoid to generate the chemical reactions.

2018-4-25
