

SPECIFICATION

产品规格书

REFOND P/N 产品型号

RF-K*HP32DS-GH-J2

☐ R&D 研发


☒ Mass Product 量产供货

Contents目录

1. Description 产品介绍	3
1.1 General Description 产品描述	3
1.2 Features 产品特征	3
1.3 Application 产品应用	3
1.4 Product Nomenclature 产品命名规则	4
1.5 Product Selection Table 产品型号	4
1.6 Package Dimension 封装尺寸	5
1.7 Product Parameters 产品参数	6
1.8 Electro-Optical Characteristics 光电特性	7
1.9 Bin Range Of Forward Voltage and Luminous Flux (IF=150mA) 电压与流明分 BIN 范围 (IF=150mA)	9
Kitting Principles 配 BIN 原则	11
1.10 Typical optical characteristics curves 典型光学特性曲线	12
2. Packaging 产品包装	17
2.1 Packaging Specification 包装规格	17
2.1.1 Carrier Tape Dimension 载带尺寸	17
2.1.2 Reel Dimension 卷盘尺寸	17
2.1.3 Label Form Specification 标签规格	18
2.2 Moisture Resistant Packing 防潮包装	18
2.3 Cardboard Box 包装纸箱	18
2.4 Reliability Test Items And Conditions 信赖性测试项目及条件	19
2.5 Criteria For Judging Damage 失效判定标准	20
3. SMT Reflow Soldering Instructions SMT 回流焊说明	21
3.1 SMT Reflow Soldering Instructions SMT 回流焊说明	21
4. Handling Precautions 产品使用注意事项	23
4.1 Handling Precautions 产品使用注意事项	23

1. Description 产品介绍

1.1 General Description 产品描述

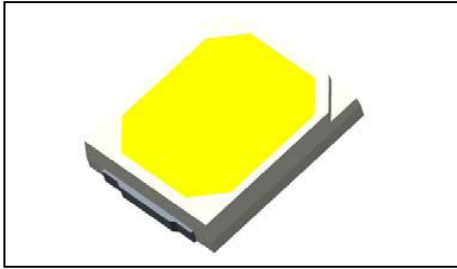

The White LED which was fabricated using a blue chip and the phosphor

Product Package: 2.75mm*3.5mm*0.7mm.

该产品为白光 LED，是由蓝光芯片激发荧光粉而形成，产品尺寸：2.75mmX3.5mmX0.7mm.

1.2 Features 产品特征


- ▶ PLCC-2 Package.封装
- ▶ Extremely wide viewing angle.发光角度大
- ▶ Suitable for all SMT assembly and solder process.适用于所有的SMT组装和焊接工艺
- ▶ Available on tape and reel.适用于载带及卷轴
- ▶ Moisture sensitivity level: Level 3.防潮等级 Level 3
- ▶ RoHS compliant.满足RoHS要求

1.3 Application 产品应用

- ▶ Indoor lighting.室内照明
- ▶ Bulb lighting.球泡灯
- ▶ General indoor applications.其它适合的室内应用

1.4 Product Nomenclature 产品命名规则

The part number designation for SMD2835 is explained as follows

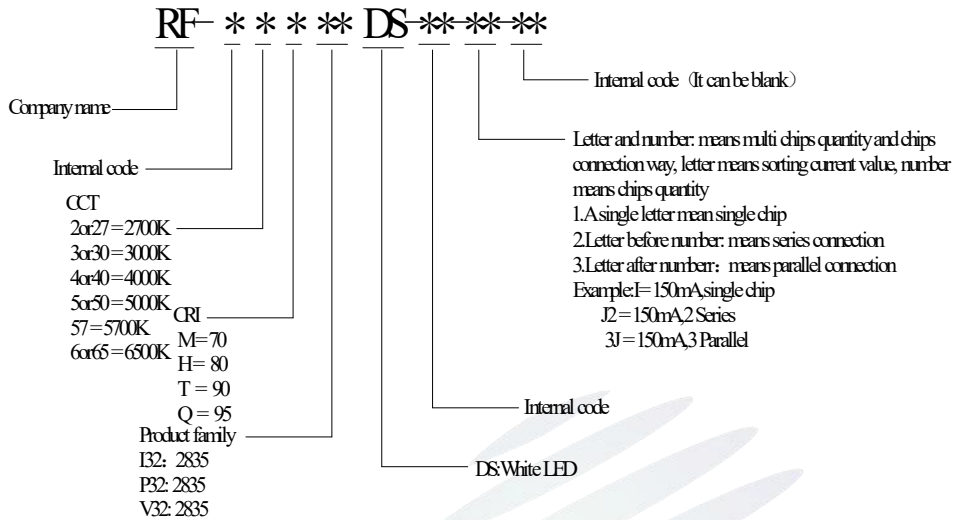

1.5 Product Selection Table 产品型号

Model NO.	CCT	Ra	IV(lm)	IF(mA)	Center			
					code	x	y	Typ CCT(K)
RF-K2HP32DS-GH-J2	2700K	80	145-160	150	E27/E27-1/2/3/4	0.4630	0.4200	2745
RF-K3HP32DS-GH-J2	3000K	80	150-165	150	E30/E30-1/2/3/4	0.4400	0.4030	2955
RF-K4HP32DS-GH-J2	4000K	80	160-170	150	E40/E40-1/2/3/4	0.3800	0.3800	4040
RF-K5HP32DS-GH-J2	5000K	80	160-170	150	E50/E50-1/2/3/4	0.3460	0.3590	4990
RF-K6HP32DS-GH-J2	6500K	80	160-170	150	E65/E65-1/2/3/4	0.3130	0.3370	6435

1.6 Package Dimension 封装尺寸

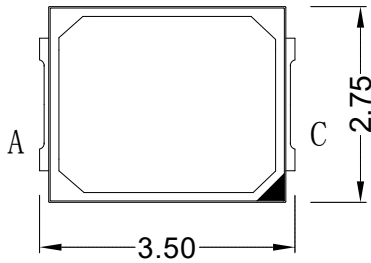


Fig.1-1 Top view 正面视图




Fig.1-2 Side view 侧面视图


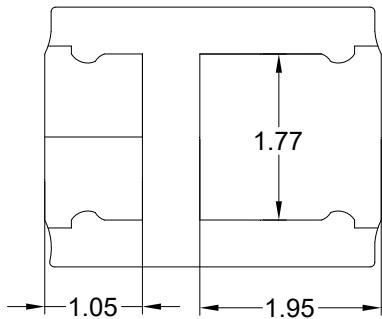


Fig.1-3 Bottom view 背面视图



Polarity
 A:anode
 C:cathode

Fig.1-4 Polarity 极性

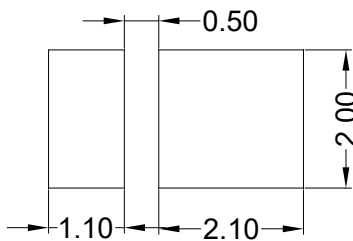


Fig.1-5 Soldering patterns 推荐焊盘

Notes 备注:

1. All dimensions units are millimATers. 所有尺寸标注单位为 mm
2. All dimensions tolerances are $\pm 0.10\text{mm}$ unless otherwise noted.除特别标注外, 所有尺寸公差为 $\pm 0.10\text{mm}$

1.7 Product Parameters 产品参数

Table 1-1 Electrical / Optical Characteristics at Ts=25°C 电性与光学特性

Item 项目	Code 代码	Symbol 符号	test condition 测试条件	RF-Value			unit 单位
				Min. (最小值)	Max. (最大值)	Typ. (典型值)	
Forward Voltage 正向电压	Rank R1	V _F	I _F =150mA	5.8	6.0	6.1	V
	Rank R2			6.0	6.2		V
	Rank S1			6.2	6.4		V
RF-K2HP32DS-GH-J2 (3step:2690-2800K) (5step:2645-2850K) Typ:2745K	Rank YHA	Φ	I _F =150mA	145	150	154	lm
	Rank ZEA			150	155		lm
	Rank ZFA			155	160		lm
RF-K3HP32DS-GH-J2 (3step:2885-3030K) (5step:2835-3085K) Typ:2955K	Rank ZFA	Φ	I _F =150mA	155	160	162	lm
	Rank ZGA			160	165		lm
	Rank ZHA			165	170		lm
RF-K4HP32DS-GH-J2 (3step:3915-4175K) (5step:3835-4270K) Typ:4040K	Rank ZHA	Φ	I _F =150mA	160	165	170	lm
	Rank ZEB			165	170		lm
	Rank ZEC			170	175		lm
RF-K5HP32DS-GH-J2 (3step:4825-5160K) (5step:4725-5275K) Typ:4990K	Rank ZGA	Φ	I _F =150mA	160	165	170	lm
	Rank ZHA			165	170		lm
	Rank ZEB			170	175		lm
RF-K6HP32DS-GH-J2 (3step:6205-6680K) (5step:6065-6850k) Typ:6435K	Rank ZGA	Φ	I _F =150mA	160	165	170	lm
	Rank ZHA			165	170		lm
	Rank ZEB			170	175		lm
Reverse Current（漏电流）		I _R	V _R =10V	---	10	---	uA
Viewing Angle（发光角度）		2Ø1/2	I _F =150mA	---	---	120	Deg
Color Rendering Index(显色指数)		CRI		---	---	80	---
		R9		0	---	---	---
Thermal resistance（热阻）		R _{THJ-S}		---	---	16	℃/W

Table 1-2 Absolute Maximum Ratings at Ts=25°C 绝对最大值

Parameter (参数)	Symbol (符号)	Rating (值)	Units (单位)
Power Dissipation (功耗)	P _D	1152	mW
Forward Current (正向电流)	I _F	180	mA
Peak Forward Current (峰值电流)	I _{FP}	300	mA
Reverse Voltage (反向电压)	V _R	10	V
Electrostatic Discharge(HBM) (静电)	ESD	2000	V
Operating Temperature (操作温度)	T _{OPR}	-40 ~ +105	°C
Storage Temperature (储存温度)	T _{STG}	-40 ~ +105	°C
Junction Temperature (结温)	T _J	125	°C

1.8 Electro-Optical Characteristics 光电特性

Product 产品型号	Current	Voltage	Φ(lm)	Efficacy (lm/w)	Ra	CCT / K
RF-K4HP32DS-FH-J2	30mA	5.42	37.4	230	83.6	3954
	60mA	5.62	72.5	215	83.1	3974
	120mA	5.82	140	200	82.5	3995
	150mA	6.1	170	185	81.2	4045

Note:

LM & VF & Ra & CCT Values are for representative reference only.



Notes 备注:

1. Pulse width $\leq$ 0.1ms, duty cycle $\leq$ 1/10. 脉宽 $\leq$ 0.1ms,占空比 $\leq$ 1/10.
2. The above forward voltage measurement allowance tolerance is $\pm 0.1V$. 以上所示电压测量误差 $\pm 0.1V$.
3. The above color coordinates measurement allowance tolerance is ± 0.005 . 以上所示坐标测量误差 ± 0.005 .
4. The above luminous intensity measurement allowance tolerance $\pm 10\%$. 上述发光强度的测试允许公差为 $\pm 10\%$.
5. The above Color rendering index measurement allowance tolerance is ± 2 以上所示显色指数测量误差 ± 2
6. Care is to be taken that power dissipation does not exceed the absolute maximum rating of the product. 使用功率不能超过规定的最大值。
7. All measurements were made under the standardized environment of Refond. 所有测试都是基于瑞丰现有的标准测试平台。
8. When the LEDs are in operation the maximum current should be decided after measuring the package temperature, junction temperature should not exceed the maximum rate. LED 使用的最大电流需要根据散热条件确定, 结温不能超过最大值。
9. ESD yield is over 90% at 2000V ESD (HBM). ESD protection during products handing is needed. 90%的LED 通过人体模式ESD2000V 测试, 在操作时请注意静电防护。

1.9 Bin Range Of Forward Voltage and Luminous Flux (IF=150mA)电压与流明分BIN 范围(IF=150mA)

Table 1-3

VF (V)	R1	R2	S1
	5.8-6.0	6.0-6.2	6.2-6.4
ϕ (lm) RF-K2HP32DS-GH-J2	YHA	ZEA	ZFA
	145-150	150-155	155-160
ϕ (lm) RF-K3HP32DS-GH-J2	ZEA	ZFA	ZGA
	150-155	155-160	160-165
ϕ (lm) RF-K4HP32DS-GH-J2	ZGA	ZHA	ZEB
	160-165	165-170	170-175
ϕ (lm) RF-K5HP32DS-GH-J2	ZGA	ZHA	ZEB
	160-165	165-170	170-175
ϕ (lm) RF-K6HP32DS-GH-J2	ZGA	ZHA	ZEB
	160-165	165-170	170-175



REFOND

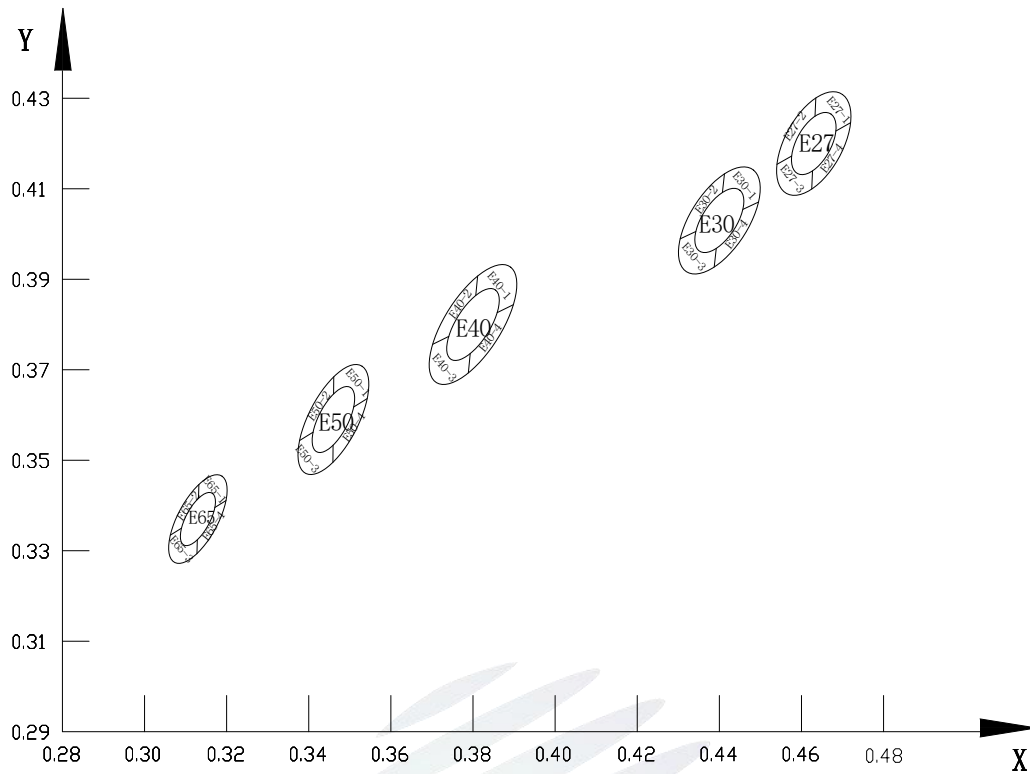


Fig 1-6 The C.I.E Chromaticity Diagram CIE色度图

Table 1-4 Color Coordinates 色坐标

3-5 step							
CCT	BIN CODE	X	Y	a	b	θ	T _c (K)
2700K	E27 (3step)	0.4630	0.4200	0.00774	0.00411	57.17	2690-2800K
	E27-1/2/3/4 (5step)			0.0129	0.00685		2645-2850K
3000K	E30 (3step)	0.4366	0.4083	0.00834	0.00408	53.10	2885-3030K
	E30-1/2/3/4 (5step)			0.0139	0.0068		2835-3085K
4000K	E40(3step)	0.3800	0.3800	0.00939	0.00402	54	3915-4175K
	E40-1/2/3/4 (5step)			0.01565	0.0067		3915-4175K
5000K	E50(3step)	0.3460	0.3590	0.00822	0.00354	59.37	3835-4270K
	E50-1/2/3/4 (5step)			0.0137	0.0059		4825-5160K
6500K	E65(3step)	0.3130	0.3370	0.00669	0.00285	58.23	4725-5275K
	E65-1/2/3/4 (5step)			0.01115	0.00475		6205-6680K

Kitting Principles 配 BIN 原则

CIE Kitting			
CCT	CIE Kit	Reel 1	Reel 2
2700K	Kit 1	E27	E27
	Kit 2	E27-1	E27-3
	Kit 3	E27-2	E27-4
3000K	Kit 1	E30	E30
	Kit 2	E30-1	E30-3
	Kit 3	E30-2	E30-4
4000K	Kit 1	E40	E40
	Kit 2	E40-1	E40-3
	Kit 3	E40-2	E40-4
5000K	Kit 1	E50	E50
	Kit 2	E50-1	E50-3
	Kit 3	E50-2	E50-4
6500K	Kit 1	E65	E65
	Kit 2	E65-1	E65-3
	Kit 3	E65-2	E65-4

Flux Kitting			
CCT	CIE Kit	Reel 1	Reel 2
2700K	Kit 1	YHA	ZFA
	Kit 2	ZEA	ZEA
	Kit 3	ZEA	ZFA
	Kit 4	ZFA	ZFA
3000K	Kit 1	ZEA	ZGA
	Kit 2	ZFA	ZFA
	Kit 3	ZFA	ZGA
	Kit 4	ZGA	ZGA
4000K	Kit 1	ZGA	ZEB
	Kit 2	ZHA	ZHA
	Kit 3	ZHA	ZEB
	Kit 4	ZEB	ZEB
5000K	Kit 1	ZGA	ZEB
	Kit 2	ZHA	ZHA
	Kit 3	ZHA	ZEB
	Kit 4	ZEB	ZEB
6500K	Kit 1	ZGA	ZEB
	Kit 2	ZHA	ZHA
	Kit 3	ZHA	ZEB
	Kit 4	ZEB	ZEB

VF Kitting			
CCT	CIE Kit	Reel 1	Reel 2
2700K	Kit 1	Y1	Y1
	Kit 2	Y2	Y2
	Kit 3	Z1	Z1
3000K	Kit 1	Y1	Y1
	Kit 2	Y2	Y2
	Kit 3	Z1	Z1
4000K	Kit 1	Y1	Y1
	Kit 2	Y2	Y2
	Kit 3	Z1	Z1
5000K	Kit 1	Y1	Y1
	Kit 2	Y2	Y2
	Kit 3	Z1	Z1
6500K	Kit 1	Y1	Y1
	Kit 2	Y2	Y2
	Kit 3	Z1	Z1

1.10 Typical optical characteristics curves 典型光学特性曲线

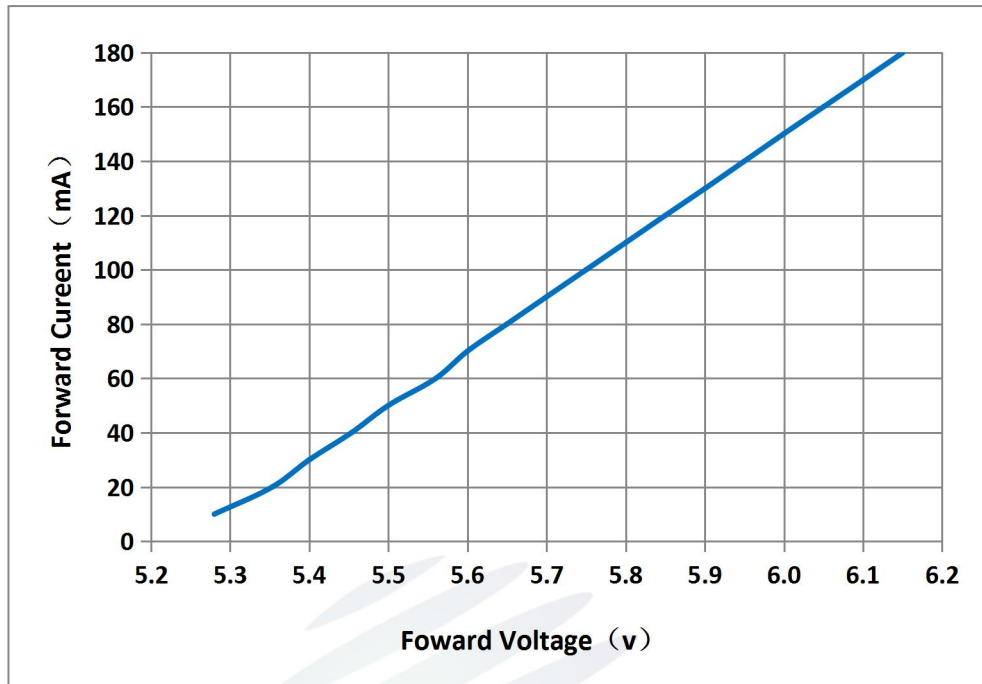


Fig 1-7 Forward Voltage Vs. Forward Current伏安特性曲线

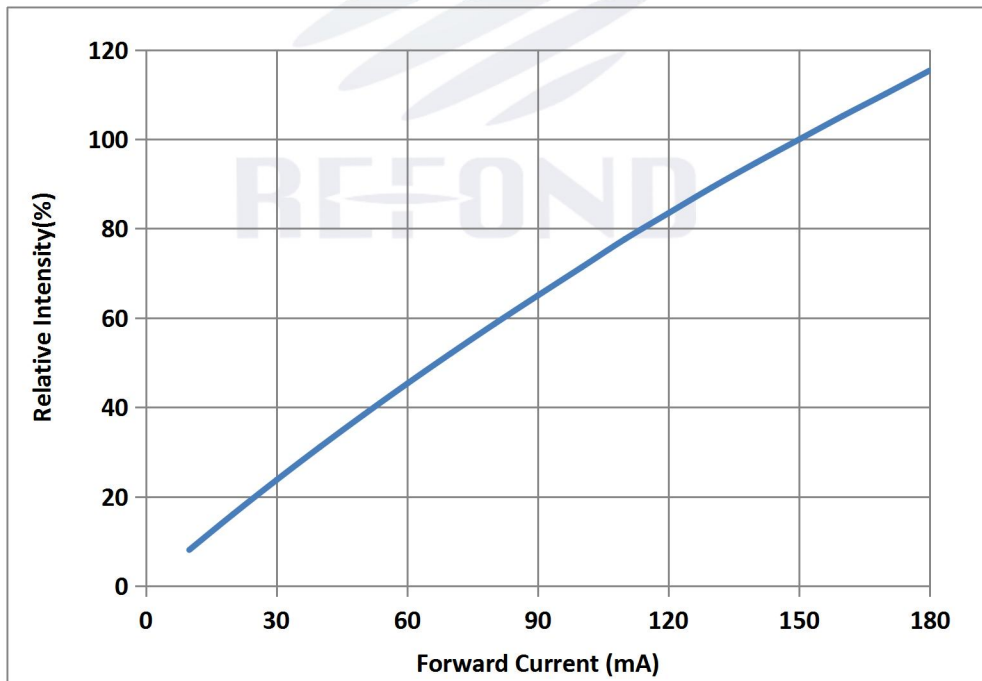


Fig 1-8 Forward Current Vs. Relative Intensity正向电流与相对光强特性曲线

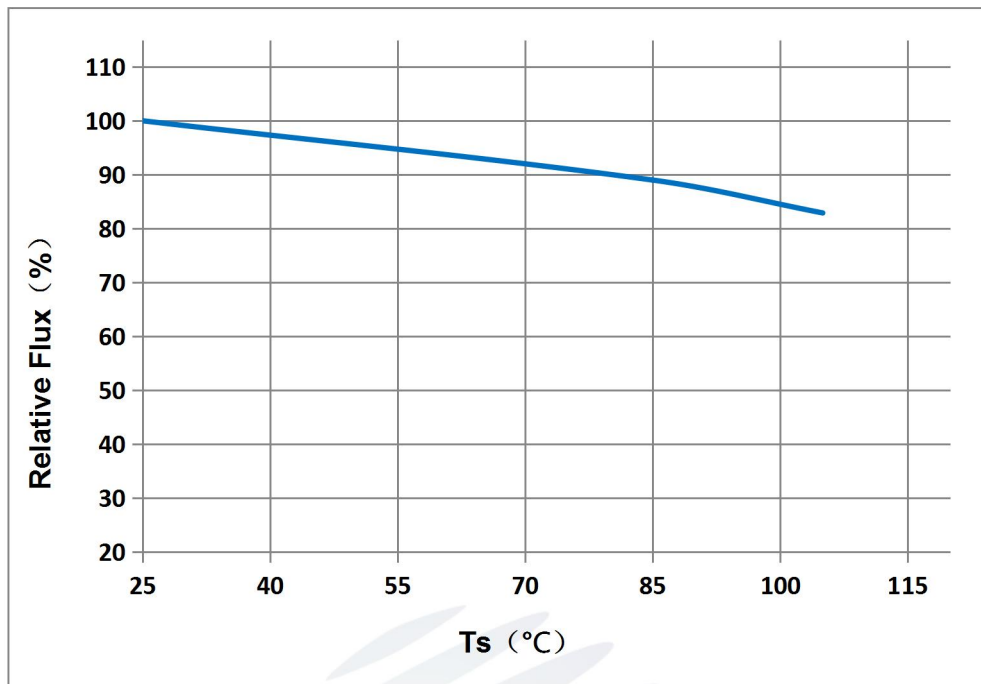


Fig 1-9 Solder Temperature Vs Relative Intensity管脚温度与相对光强特性曲线

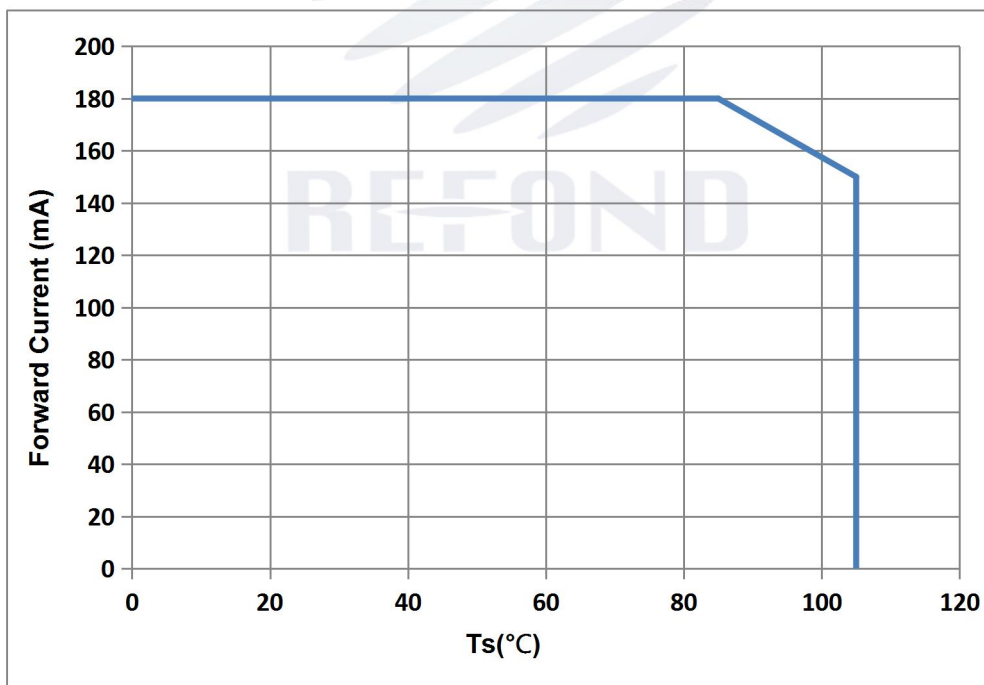


Fig 1-10 Solder Temperature Vs. Forward Current管脚温度与正向电流特性曲线

$T_j \leq 125^\circ\text{C}$

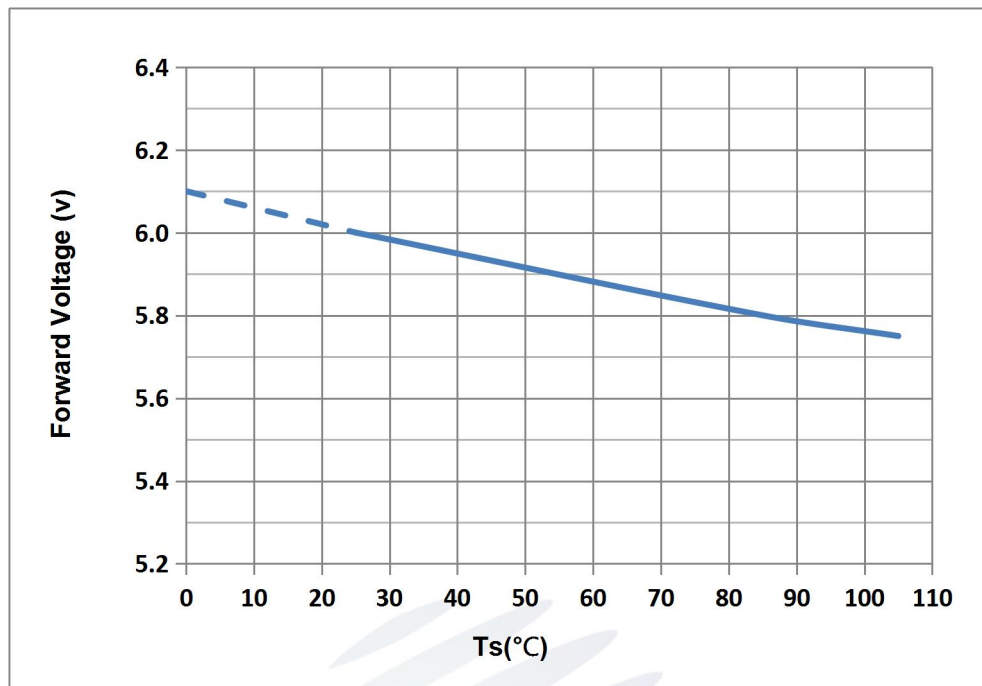


Fig 1-11 Forward Voltage Vs Solder Temperature电压与管脚温度特性曲线

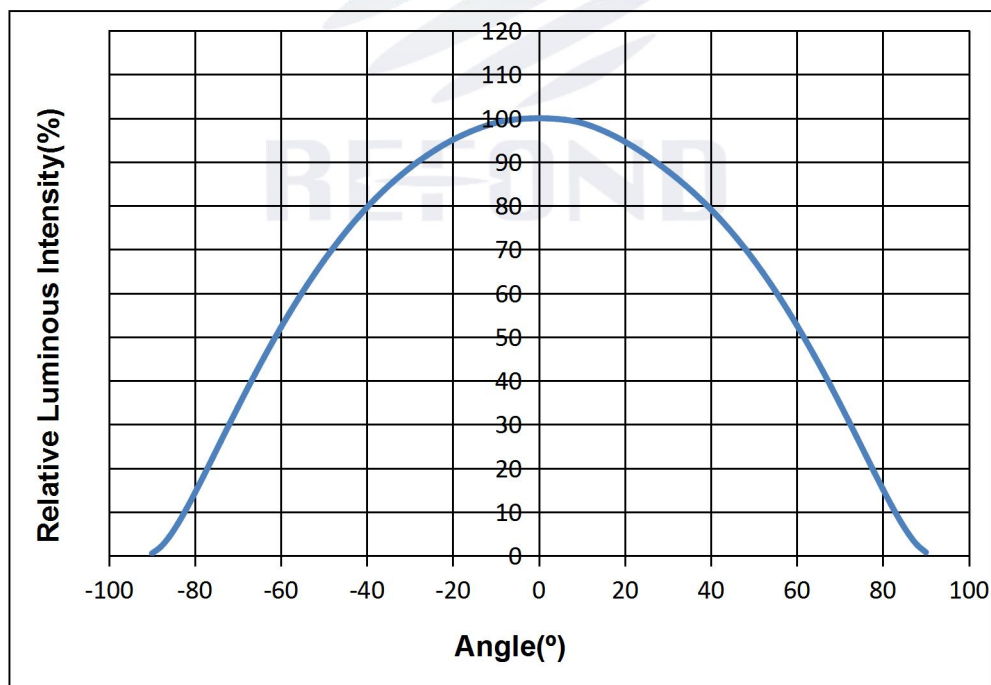


Fig 1-12 Radiation diagram辐射特性曲线

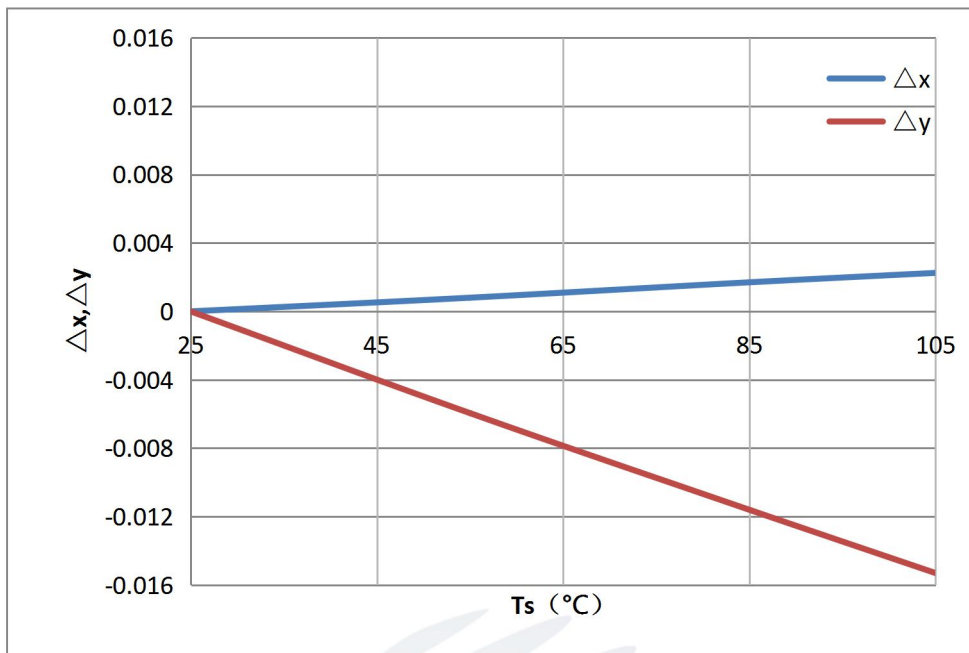


Fig 1-13 $\Delta CIE_x, CIE_y$ vs Temperature xy与温度特性曲线

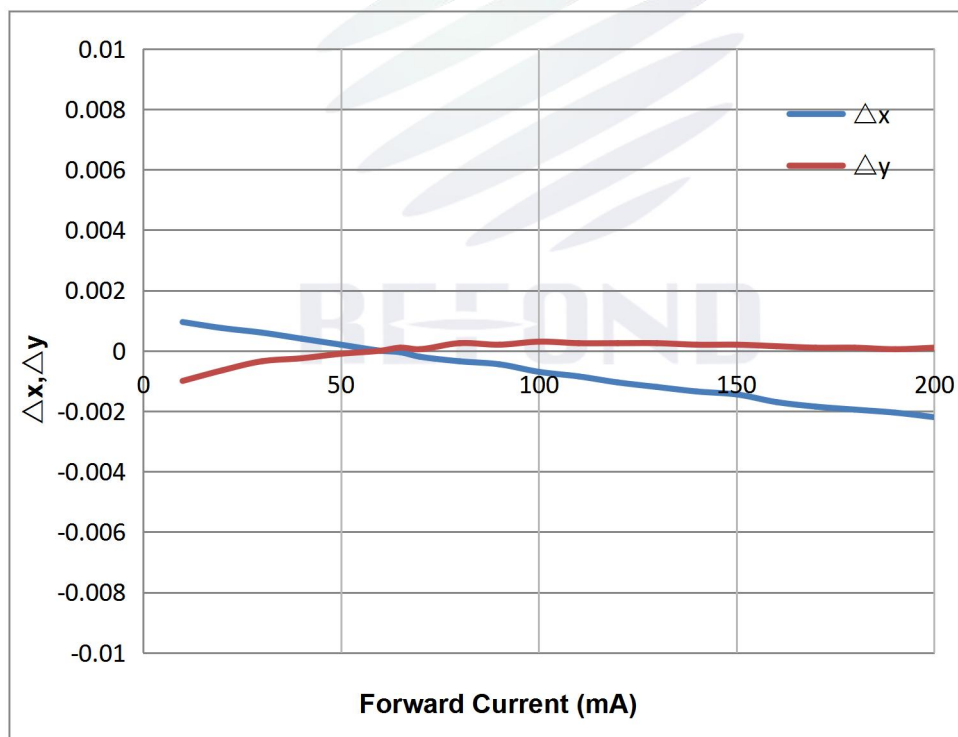


Fig 1-14 $\Delta CIE_x, CIE_y$ vs Forward Current xy与电流特性曲线

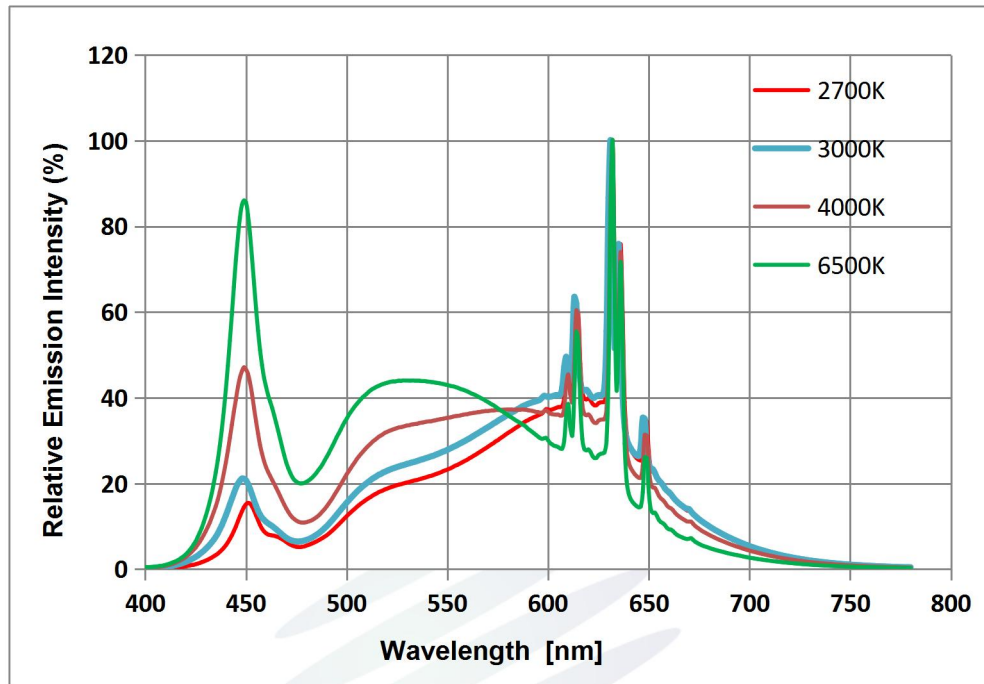


Fig 1-15 Spectrum Distribution光谱分布特性曲线

REFOND

2. Packaging 产品包装

2.1 Packaging Specification 包装规格

Package:16000pcs/reel or 4000pcs/reel.包装每卷 16000pcs 或 4000pcs。

2.1.1Carrier Tape Dimension 载带尺寸

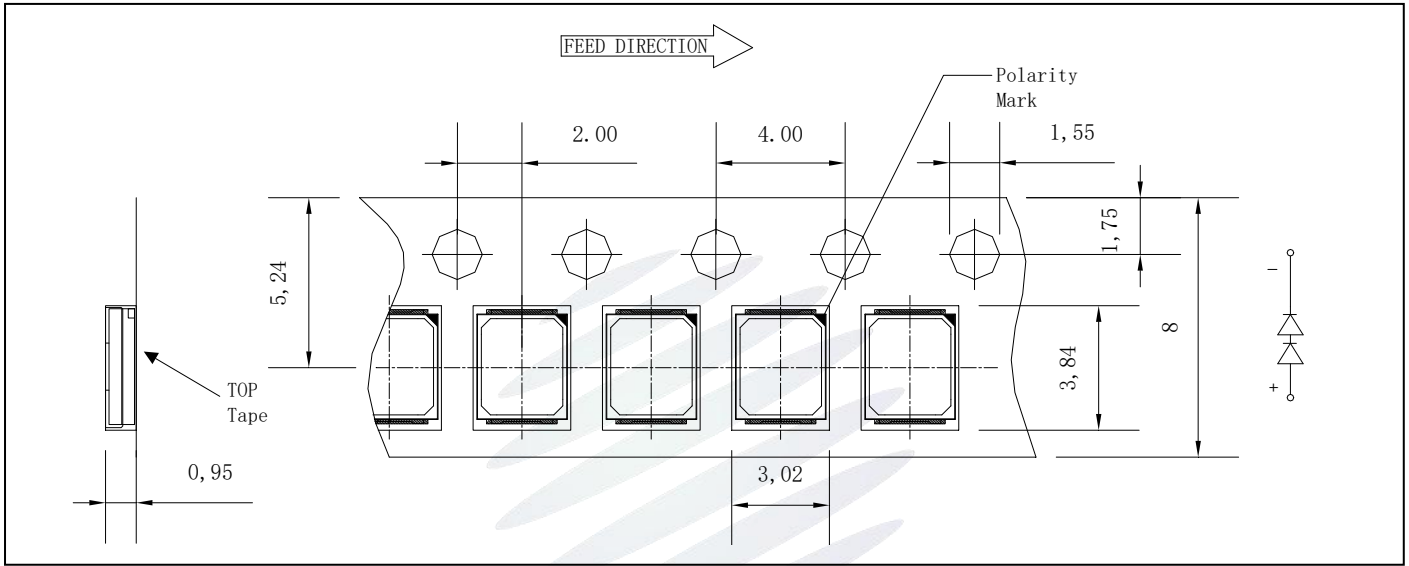


Fig.2-1 Carrier Tape Dimension 载带尺寸

2.1.2 Reel Dimension 卷盘尺寸

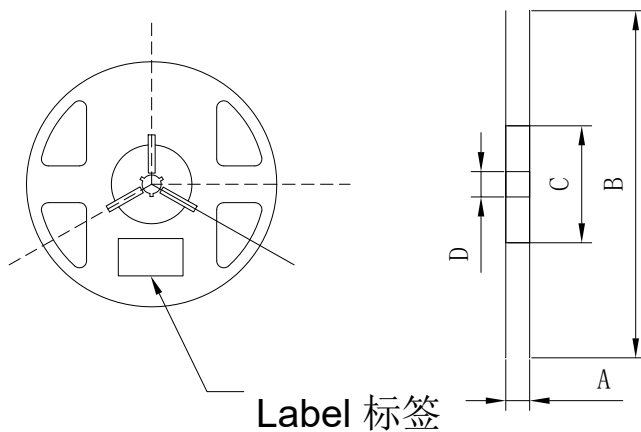


Fig.2-2Title

Table 2-1 Title

	16000pcs	4000pcs
A	12.7±0.3mm	11.75±0.3mm
B	330.2±2mm	177.8±0.2mm
C	79.5±0.2mm	58.5±0.2mm
D	14.3±0.2mm	13.5±0.2mm

Notes 备注:

The tolerances unless mentioned ±0.1mm. Unit : mm注 : 未注公差为±0.1毫米, 尺寸单位 : 毫米。

2.1.3 Label Form Specification 标签规格

PART NO:		
SPEC NO:		
LOT NO		
BIN CODE:		
Φ:	XY:	
VF:	WLD:	
		
		QTY:
		DATE:

Fig 2-3 Title

Table 2-2 Title

PART NO.	Part Number 品名
SPEC NO.	Spec Number 规格
LOT NO.	Lot Number 批次号
BIN CODE	Bin Code 参数代码
Φ	Luminous flux 光通量
XY	Chromaticity Bin 色区
V _F	Forward Voltage 正向电压
WLD	Wavelength 波长代码
QTY	Packing Quantity 数量
DATE	Made Date 生产日期

2.2 Moisture Resistant Packing 防潮包装

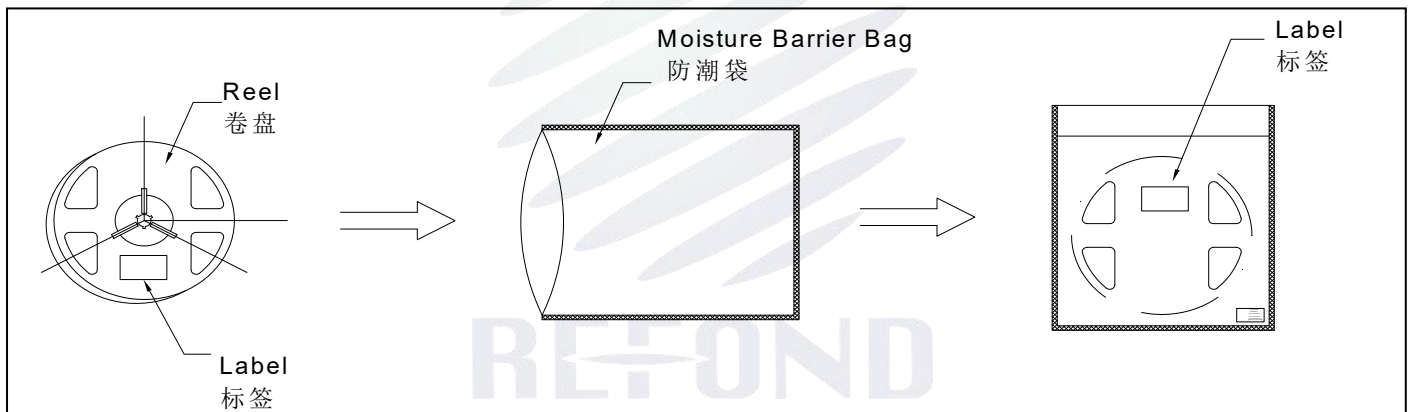


Fig.2-4Title

2.3 Cardboard Box 包装纸箱

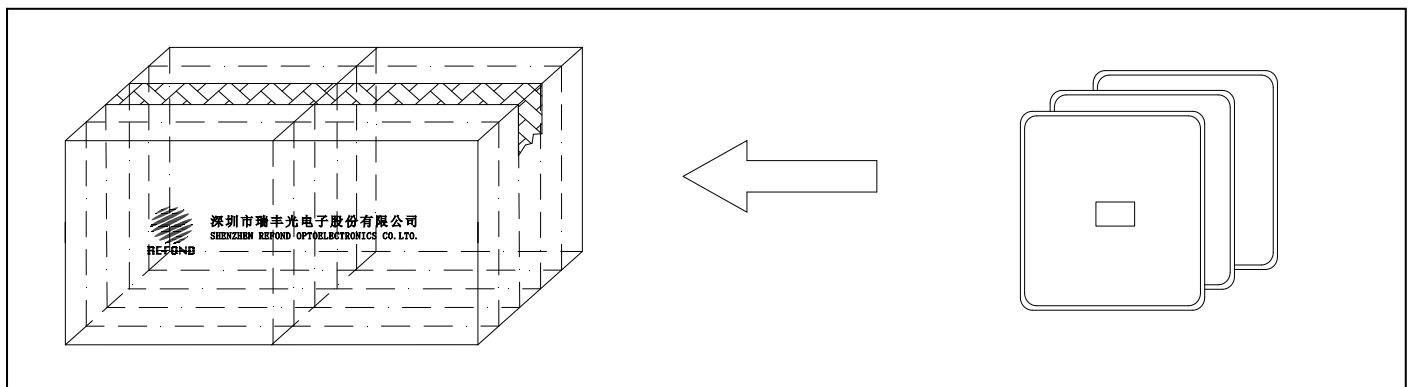


Fig.2-5Title

2.4 Reliability Test Items And Conditions 信赖性测试项目及条件

Table 2-3 Title

Test Items 项目	Ref. Standard 参考标准	Test Condition 测试条件	Time 时间	Quantity 数量	Ac/Re 接收/拒收
Reflow 回流焊	JESD22-B106	Temp:260°Cmax T=10 sec	2times	10pcs	0/1
Thermal Shock 冷热冲击	JEITAED-4701 300307	-40°C 15min ↑↓10s 100°C 15min	300cycles	10pcs	0/1
High Temperature Storage 高温保存	JEITAED-4701 200 201	Temp:100°C	1000hrs	10pcs	0/1
Low Temperature Storage 低温保存	JEITA ED-4701 200 202	Temp:-40°C	1000hrs	10pcs	0/1
Life Test 常温通电	JESD22-A108	Ta=25°C I _F =150mA	1000hrs	10pcs	0/1
High Temperature High Humidity Life Test 高温高湿通电	JESD22-A101	60°C/ 90%RH I _F =150mA	1000hrs	10pcs	0/1
Temperature Humidity Storage 高温高湿储存	JEITA ED-4701 100 103	T _A =85°C R _H =85%	1000hrs	10pcs	0/1
Sulfur test 硫化试验	/	80°C, 4H, 0.6硫粉	4hrs	10pcs	0/1

2.5 Criteria For Judging Damage 失效判定标准

Table 2-4 Title

Test Items 项目	Symbol 符号	Test Condition 测试条件	Criteria For Judgement 判定标准	
			Min. 最小	Max. 最大
Forward Voltage 正向电压	V_F	$I_F=150\text{mA}$	-	$(U.S.L^*) \times 1.1$
Reverse Current 反向电流	I_R	$V_R = 10\text{V}$	-	$(U.S.L^*) \times 2.0$
Luminous Flux 光通量	Φ	$I_F=150\text{mA}$	$(L.S.L^*) \times 0.7$	-

Notes 备注:

1. U.S.L: Upper standard level 规格上限 L.S.L: Lower standard level 规格下限
2. The above reliability tests is based on the verification of a single/strip LED of Refond's existing experimental platform, the reliability experiment was taken under good heat dissipation conditions. when customers applies the LED to the series and parallel circuit, should take consideration of all the factors such as the current, voltage distribution, heat dissipation and others. 以上可靠性测试是基于瑞丰现有实验平台单颗/条 LED 在良好散热条件验证下的结果。客户端将 LED 应用于串、并联线路时，需自行评估电流、电压分配、散热等问题。
- 3.The technical information shown in the data sheets are limited to the typical characteristics and circuit examples of the referenced products. It does not constitute the warranting of industrial property nor the granting of any license. 以上技术数据仅为产品的典型值，只作为参考，不作为任何应用条件及应用方式的保证。

3. SMT Reflow Soldering Instructions SMT 回流焊说明

3.1 SMT Reflow Soldering Instructions SMT 回流焊说明

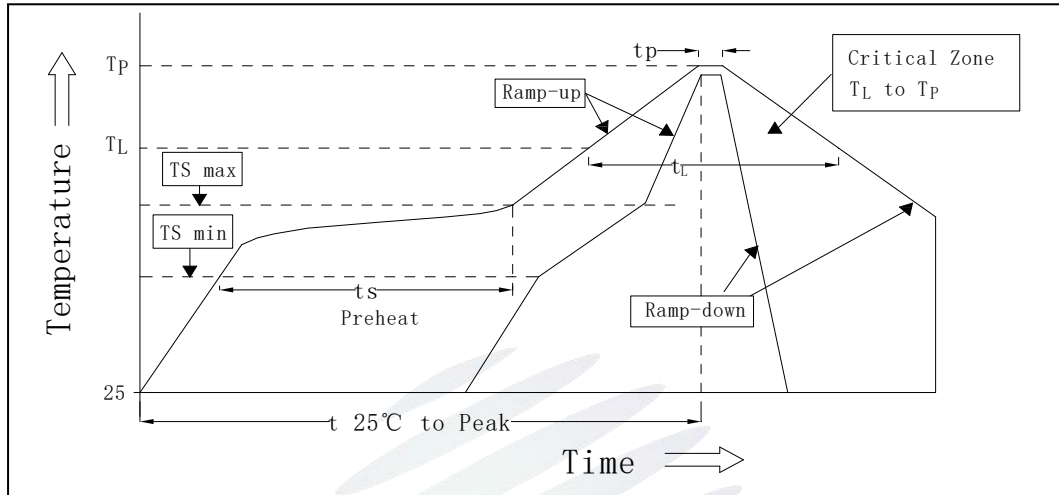


Fig.3-1Title

Table 3-1Title

Average temperature rise speed平均升温速度 (Ts max 至Tp)	最高3 °C/秒 Max 3 °C/ s
Preheating: minimum temperature预热：最低温度 (Ts min)	150 °C
Preheating: Max temperature预热：最高温度 (Ts max)	200 °C
Preheating: Time预热：时间 (Ts min 至Ts max)	60 - 120秒 60s-120s
Time limited to maintain high temperature: the temperature限时维持高温：温度 (TL)	217 °C
Time limited to maintain high temperature: The Time 限时维持高温：时间 (tL)	最多60秒 Max 60s
Peak /Classification of temperature:峰值 / 分类温度 (TP)	260 °C
Time limit classification of peak temperature time限时峰值分类温度：时间 (tp)	最多10秒 Max 10s
Hold time within 5 °C with the actual peak temperature (TP) 与实际峰值温度 (TP) 相差 5 °C 以内的保持时间	最多30秒 Max 30s
Cooling speed 降温速度	最高6 °C/秒 Max 6 °C/ s
Needed time from 25 °C to Tp 25 °C 升至峰值温度所需时间	最多8分钟 Max 8 minutes

Notes 备注:

(1)Reflow soldering should not be done more than two times. In the case of more than 24 hours passed soldering after first, LEDs will be damaged. 回流焊次数不可以超过两次, 两次回流焊的时间间隔如果超过24小时, LED可能由于吸湿而损坏。

(2)When soldering , do not put stress on the LEDs during heating.当焊接时, 不要在材料受热时用力压胶体表面。

3.1.1 Soldering Iron 烙铁焊接

(1) When hand soldering, keep the temperature of iron below less 300°C less than 3 seconds 当手工焊接时, 烙铁的温度必须小于300°C, 时间不可超过3秒。

(2) The hand solder should be done only one time.手工焊接只可焊接一次。

3.1.2 Repairing 修补

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed in advance whether the characteristics of LEDs will or will not be damaged by repairing.

LED回流焊后不应该修复, 当必须修复时, 必须使用双头烙铁, 而且事先应确认此种方式会不会损坏LED本身的特性。

3.1.3 Cautions 注意事项

(1) The encapsulated material of the LEDs is silicone. Therefore the LEDs have a soft surface on the top of package. The pressure to the top surface will be influence to the reliability of the LEDs. Precautions should be taken to avoid the strong pressure on the encapsulated part. So when use the picking up nozzle, the pressure on the silicone resin should be proper. LED封装胶为硅胶, 表面较软, 用力按压胶体表面会影响LED可靠性, 因此应有预防措施避免在按压器件, 当使用吸嘴时, 胶体表面的压力应是恰当的。

(2) Components should not be mounted on warped (non coplanar) portion of PCB. After soldering, do not warp the circuit board.LED 灯珠不要焊接在弯曲的 PCB 板上, 焊接之后, 也不要弯折线路板。

(3) Do not apply mechanical force or excess vibration during the cooling process to normal temperature after soldering. Do not rapidly cool device after soldering.回流焊之后冷却过程中，不要对材料施加外力，也不要震动，回流焊后，不要采用激剧冷却的方式。

4. Handling Precautions 产品使用注意事项

4.1 Handling Precautions 产品使用注意事项

(1) LED operating environment and sulfur element composition cannot be over 100PPM in the LED mating usage material. This is provided for informational purposes only and is not a warranty or endorsement.LED 工作环境及与 LED 适配的材料中硫元素及化合物成份不可超过 100PPM.这只是一个建议，不作任何品质担保。

(2) In order to prevent ex-ternal material from getting into the inside of LED, which may cause the malfunction of LED, the single content of Bromine element is required to be less than 900PPM,the single content of Chlorine elementis required to be less than 900PPM,the total content of Bromine element and Chlorine element in the external materials of the application products is required to be less than 1500PPM. This is provided for informational purposes only and is not a warranty or endorsement.为了防止外界物质进入 LED 内部以造成 LED 的损伤，所处环境及所用套件等等，单一的溴元素含量要求小于 900PPM，单一氯元素含量要求小于 900PPM，溴元素与氯元素总含量必须小于 1500PPM. 这只是一个建议，不作任何品质担保。

(3) VOCs (Volatile organic compounds) emitted from materials used in the construction of fixtures can penetrate silicone encapsulants of LEDs and discolor when exposed to heat and photonic energy. The result can be a significant loss of light output from the fixture. Knowledge of the properties of the materials selected to be used in the construction of fixtures can help prevent these issues. Refond advises against the use of any chemicals or materials that have been found or are suspected to have an adverse affect on device performance or reliability. To verify compatibility, Refond recommends that all chemicals and materials be tested in the specific application and environment for which they are intended to be used. Attaching LEDs, do not use adhesives that out gas organic vapor. 应用套件中的挥发性物质会渗透到 LED 内部，在通电产生光子及热的条件下，会导致 LED 变色，进而造成严重光衰，提前了解套件材料能够避免产生这些问题。瑞丰反对使用任何对 LED 器件的性能或者可靠性有害的物质或材料，不管这些材料是已经证实

了的还是仅仅怀疑有害。针对特定的用途和使用环境，瑞丰建议对所有的物质和材料进行相容性的测试。在贴装 LED 时候，不要使用能产生有机挥发性气体的粘结剂。

(4) Handle the component along the side surface by using forceps or appropriate tools; do not directly touch or Handle the silicone lens surface, it may damage the internal circuitry. 通过使用适当的工具从材料侧面夹取，不可直接用手或尖锐金属压胶体表面，它可能会损坏内部电路。

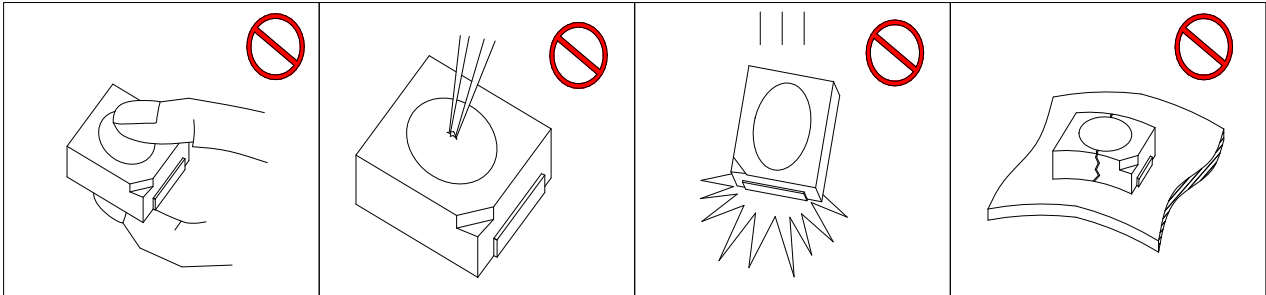


Fig 4-1 Title

(5) In designing a circuit, the current through each LED can not exceed the absolute maximum rating specified for each LED. In the meanwhile, resistors for protection should be applied, otherwise slight voltage shift will cause big current change, burn out may happen. The driving circuit must be designed to allow forward voltage only when it is ON or OFF. If the reverse voltage is applied to LED, migration can be generated resulting in LED damage. 设计电路时，通过 LED 的电流不能超过规定的最大值，同时，还需使用保护电阻，否则，微小的电压变化将会引起较大电流变化，可能导致产品损毁。电路设计必须保证只有在开启或者关闭的时候出现正向电压的变化，不要施加反压，否则会损坏 LED。

(6) Thermal Design is paramount importance because heat generation may result in the Characteristics decline, such as brightness decreased, Color change and so on. Please consider the heat generation of the LEDs when making the system design. LED 容易因为自身的发热和环境的温度改变而改变，温度升高会降低 LED 发光效率，影响发光颜色，所以在设计时应充分考虑散热问题。

(7) Compared to standard encapsulants, silicone is generally softer, and the surface is more likely to attract dust · requiring special care during processing. In cases where a minimal level of dirt and dust particles cannot be guaranteed, a suitable cleaning solution must be applied to the surface after the soldering of components. Refond suggests using isopropyl alcohol for cleaning. In case other solvents are used, it must be assured that these solvents do not dissolve the

package or resin. Ultrasonic cleaning is not recommended. Ultrasonic cleaning may cause damage to the LED. 与其他封装胶相比，硅胶通常较软，表面易吸附脏物，应用时应特别注意，当对产品洁净度要求较高时，回流焊以后需要采用恰当的清洗方式，我们推荐用异丙醇作清洗剂，如需要用到其他清洗剂，必须保证不会破坏封装体，超声清洗可能会对 LED 带来损害，不推荐这种清洗方式。

Table 4-1Storage 储存

Conditions 种类		Temperature 温度	Humidity 湿度	Time 时间
Storage 储存	Before Opening Aluminum Bag 拆包前	$\leq 30^{\circ}\text{C}$	$\leq 75\%$	Within 1 Year From Date 一年内
	After Opening Aluminum Bag 拆包后	$\leq 30^{\circ}\text{C}$	$\leq 60\%$	24hours 24小时
Baking 烘烤		$75 \pm 5^{\circ}\text{C}$	-	$\geq 72\text{hours}$ 大于72小时

(8) If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time , baking treatment should be performed after unpacking and based on the following condition (75 ± 5) $^{\circ}\text{C}$ for above 72 hours.如果干燥剂或包装失效，或者产品不符合以上有效储存条件，需拆包后进行烘烤，烘烤条件： $75 \pm 5^{\circ}\text{C}$ ，大于 72 小时。

If the package is flatulence or damaged, please notify the sales staff to assist.如果包装胀气或者破损，请通知销售人员协助处理。

(9) Similar to most Solid state devices; LEDs are sensitive to Electro-Static Discharge (ESD) and Electrical Over Stress (EOS). 像其他的半导体电子器件一样，LED 对静电过流击穿非常敏感，需要做好防护。

(10) Other points for attention, please refer to our relevant information.其它注意事项请参照瑞丰相关资料。

[illegible]



www.refond.com

REFOND

Declare 申明

This specification is written both in English and in Chinese and the latter is formal.

产品规格书以中英文方式书写，若有冲突以中文版本为准。