




1、Features/特 征:

- Emitting Color/发光颜色: Blue
- Lens Type/封装特性: Water Clear
- Device Outline/外形特征: $1.6 \times 0.6 \times 1.0\text{mm}$
- RoHS compliant/符合 RoHS 标准



2、Applications/应 用:

- Backlight for Mobile, Machine Vision, LCD Display/手机、电话、显示屏背光源
- Backlight in Dashboard and switch of Automotive/汽车仪表盘、记程器背光源

3、Outline Dimensions/产品外形尺寸:

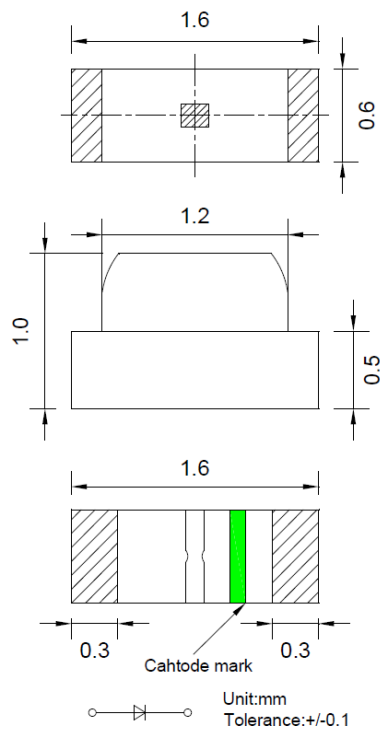

被推荐的回焊焊盘尺寸:

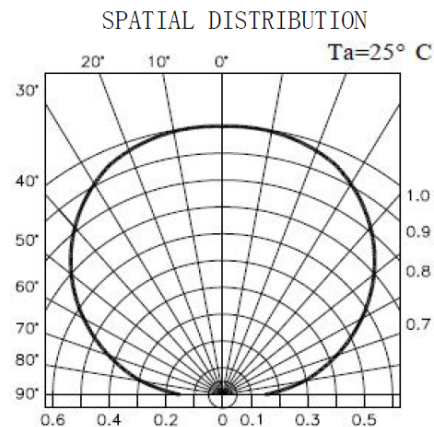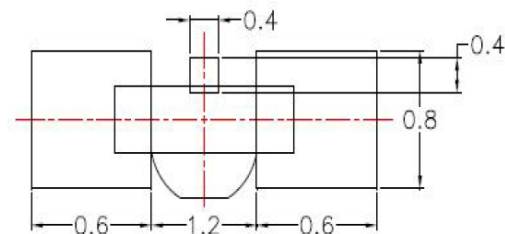



SUNSHINE ELECTRONICS TRADING LIMITED

Part No: SEL-191SSBC-C01

4、Absolute maximum ratings/极限参数 (Ta = 25℃)

Parameter 参数	Symbol 符号	Test Condition 测试条件	Value 参数		Unit 单位
			Min.	Max.	
Power Dissipation 损耗功率	Pd	——	——	90	mW
Reverse Voltage 反向电压	VR	IR = 30 μ A	5	——	V
Pulse Current 正向峰值电流	IFp	Duty=0.1, 1kHz	——	60	mA
Forward Current 正向工作电流	IFm	——	——	25	mA
Operating Temperature 工作温度范围	Topr	——	-40	+85	℃
Storage Temperature 储存温度范围	Tstr	——	-40	+85	℃

5、Electrical and optical characteristics/光电参数 (Ta = 25℃)

Parameter 参数	Symbol 符号	Test Condition 测试条件	Value 参数			Unit 单位
			Min.	Typ.	Max.	
Forward Voltage 正向电压	VF	IF = 5mA	——	2.9	3.2	V
Reverse Current 反向电流	IR	VR = 5V	——	——	30	μ A
Dominate Wavelength 主波长	λ_d	IF = 5mA	——	470	——	nm
Peak Wavelength 峰值波长	λ_p	IF = 5mA	——	468	——	nm
Spectral Line half-width 半波宽度	$\Delta \lambda$	IF = 5mA	——	20	——	nm
Luminous Intensity 发光强度	IV	IF = 5mA	18	28.5	——	mcd
Viewing Angle 发光指向角	2 θ 1/2	IF = 5Ma	——	130	——	Deg.



6、Intensity and forward voltage bin limits (亮度及电压等级)

Intensity bin limits (IF=5mA)

Rank	IV (mcd)	
	Min	Max
G1	18	22.5
G2	22.5	28.5
H1	28.5	36
H2	36	45
J1	45	57

Tolerance: $\pm 10\%$

Forward voltage bin limits (IF=5mA) <VF 值等级>

Rank	VF (V)	
	Min	Max
F	2.5	2.6
H	2.6	2.7
J	2.7	2.8
L	2.8	2.9
N	2.9	3.0
Q	3.0	3.1

Tolerance: $\pm 0.05V$






Color bin limits (IF=5mA)

Rank	λd (nm)	
	Min	Max
B7	460	465
B8	465	470
B9	470	475

Tolerance: $\pm 1nm$



7、Typical electrical/optical characteristic curves/光电特性曲线:

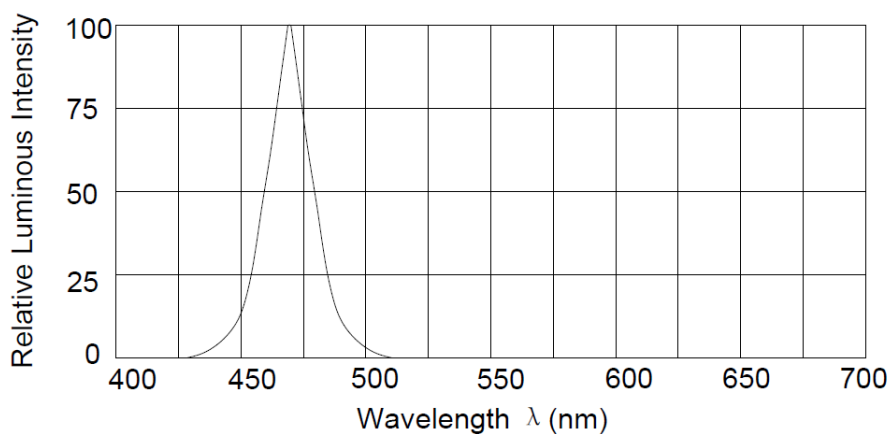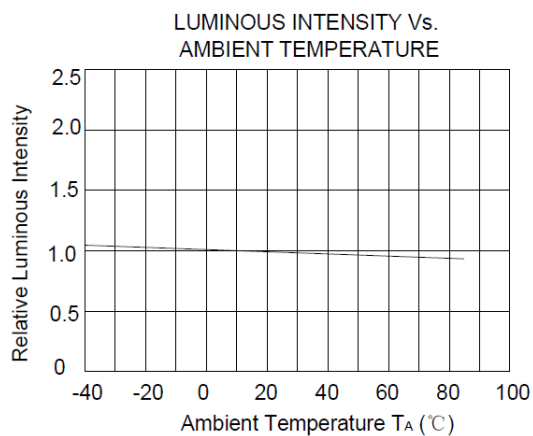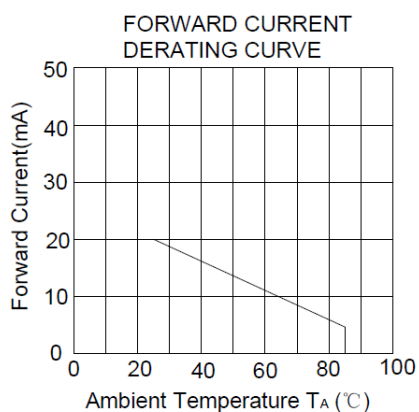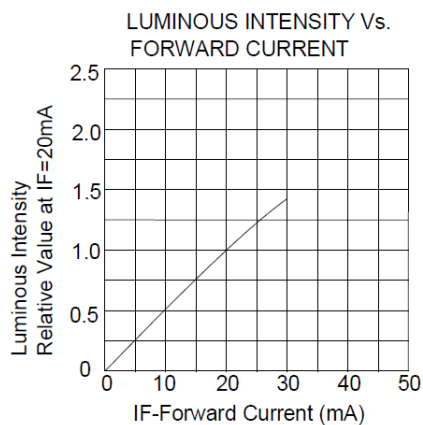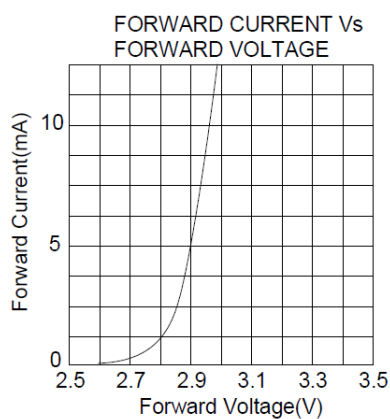



SUNSHINE ELECTRONICS TRADING LIMITED

Part No: SEL-191SSBC-C01

8、Reliability Analysis/可靠性分析

8.1 Test Items And Results/测试项目和结果

No.	Item/项目	Test Condition/测试条件	Spec. /引用标准	Q' ty/数量	Time/时间	Standard/判定
1	IR Reflow (Reflow Soldering) /回流焊接	Tsld=260℃, 10sec	GB/T 4937, II, 2.2	20	2times	ALL PASS
2	Solder ability/可焊性	Tsld=235±5℃, 3sec			1times Over 95%	ALL PASS
3	Temperature Cycle/ 高低温循环	-40℃—— 100℃ 30min ~ 30min The cut is not more than 1 min	GB/T 4937, III, 1	20	50cycles	ALL PASS
4	Moisture Resistance Cyclic /湿热循环	25℃/12hr~ 55℃/12hr 95%RH	GB/T 4937, III, 4	20	6cycles	ALL PASS
5	High Temperature Storage /高温储存	Ta=100℃	GB/T 4937, III, 2	20	1000hrs	ALL PASS
6	Low Temperature Storage /低温储存	Ta=-40℃	GB/T 4937, III, 2	20	1000hrs	ALL PASS
7	Steady State perating Life /电耐久性	IF=20mA Ta=25℃	GB/T18904.3 Part A	20	1000hrs	Iv decay <30%

8.2 Criteria For Judging Damage/判断标准

Item/项目	Symbol/ 符号	Test conditions /测试条件	Criteria for Judgement /判断标准	
			Min. /最小值	Max. /最大值
Luminous Intensity/亮度	Iv	IF=20mA	Iv*0.7	/
Forward Voltage/正向电压	VF	IF=20mA	/	U. S. L*1.1
Reverse current/反向电流	IR	VR=5v	/	U. S. L*2

*U.S.L.: Upper Standard Level / 上限

*L.S.L.: Lower Standard Level / 下限



SUNSHINE ELECTRONICS TRADING LIMITED

Part No: SEL-191SSBC-C01

9、Specification of Packing /包装规格

9.1 Taping and Orientation /编带和方向

Quantity/数量: 4000 units/reel

Diameter/直径: 178 mm

